1. Alignment and Adjustments

1-1 Instrument

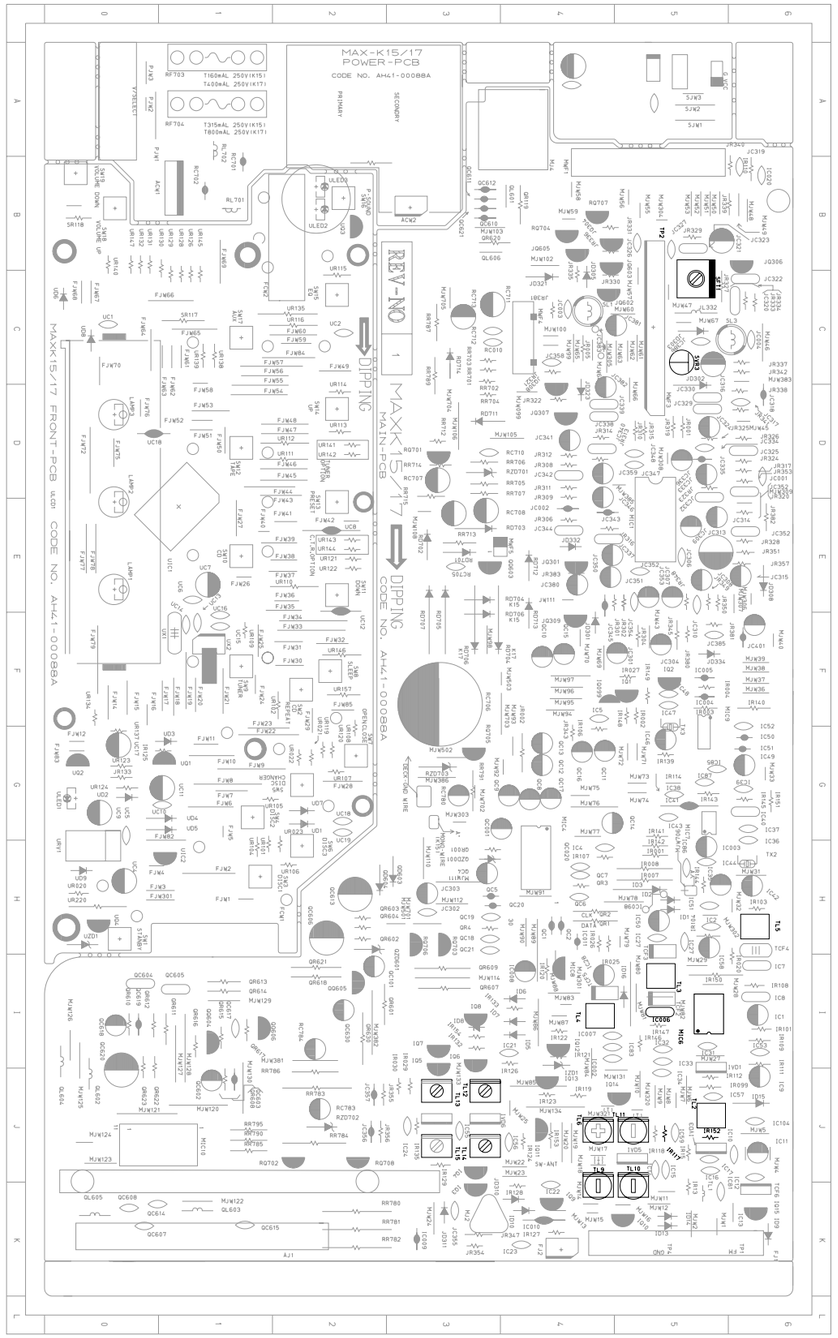

Fig 1-1 Location of Adjustment Point

1-1-1 Test Equipment

1. AM/FM Standard Signal Generator (S.S.G)
   - AM : 400Hz, 30% MOD - FM : 1KHz , 40KHz(Deviation)
2. Oscilloscope
3. VTVM
4. Frequency counter
5. Loop antenna
6. Dummy load (4Ω)
7. DC voltmeter
8. SW Dummy ANT
9. FM Stereo Modulator
10. FM/AM IF Generator : 10.7MHz,455kHz

1-1-2 Pre-Adjustment

1. Check the source voltage
2. Select desired Band and Function.
3. Set the SURROUND control to off position.
4. Set volume control to approximatly 50mW(4Ω)

1-2 Tuner Section

1-2-1 FM Adjustment(T-BAND, OIRT-BAND :OPTION)

	Circuit to be Adjusted	Measuring Instrument & Arrangement	Step	S.S.G Frequency	Radio dial Setting	Adjusting Point	Adjust for
FM	Frequency coverage	Connect FM signal generator to loop antenna,VTVM AND oscilloscope(Fig 1-2)	T-BAND ATT:60dB	87.5MHz	87.5MHz	FM OSC COIL(TL2)	Aduust for 1.8V±0.05V at the low. Check for 9.0V±0.2V at the high. (IR152)
			OIRT ATT:60dB	65MHz	65MHz	FM OSC COIL(TL2)	Aduust for 1.8±0.05V at the low. Check for 9.0V±0.2V at the high. (IR152)
	DET COIL	"	-	FREQ: 90MHz ATT: 60dB	90MHz	TL5	Aduust for 1.2V±0.02V at the location NO of IC006(104M).
	IF COIL	"	-	FREQ: 90MHz ATT: 18dB	90MHz	TL4	Aduust for sine wave closely

1-2-2 AM(MW),LW,SW1,SW2 Adjustment

	Circuit to be Adjusted	Measuring Instrument & Arrangement	Step	S.S.G Frequency	Radio dial Setting	Adjusting Point	Adjust for
AM (MW)	OSC	Connect AM signal generator to loop antenna,VTVM AND oscilloscope (Fig 1-3)	1	522KHz	522KHz	TL11	Aduust for 1.0V±0.1V at the low. (IR117)
			2	1611KHz	1611KHz	-	Check for 7.0V±1.0V at the high. (IR117)
	RF	"	1	594KHz	594KHz	TL10	Maximum out
	DET	"	1	594KHz ATT:60dB	594KHz	-	Check for 1.2V±0.03V at the location NO of IC006(104M) after short-circuit IC1(0.47u).
	INTER FREQ	"	1	455KHz	522KHz	TL3	Maximum out
LW	OSC	Fig 1-3	1		146KHz	TL6	Aduust for 2.0V±0.1V at the low.
			2		290KHz	-	Check for 7.0V±1.0V at the high.
	RF		1	150KHz	150KHz	TL9	Maximum out
SW1	OSC	Fig 1-3	1		2.3MHz	TL4	Aduust for 1.0V±0.1V at the low.
			2		7.3MHz	-	Check for 8.5V±1.0V at the high.
	RF		1	3.5MHz	3.5MHz	TL8	Maximum out
SW2	OSC	Fig 1-3	1		9.5MHz	TL3	Aduust for 1.5V±0.1V at the low.
			2		26.1MHz	-	Check for 8.0V±1.0V at the high.
	RF		1	10MHz	10MHz	TL5	Maximum out

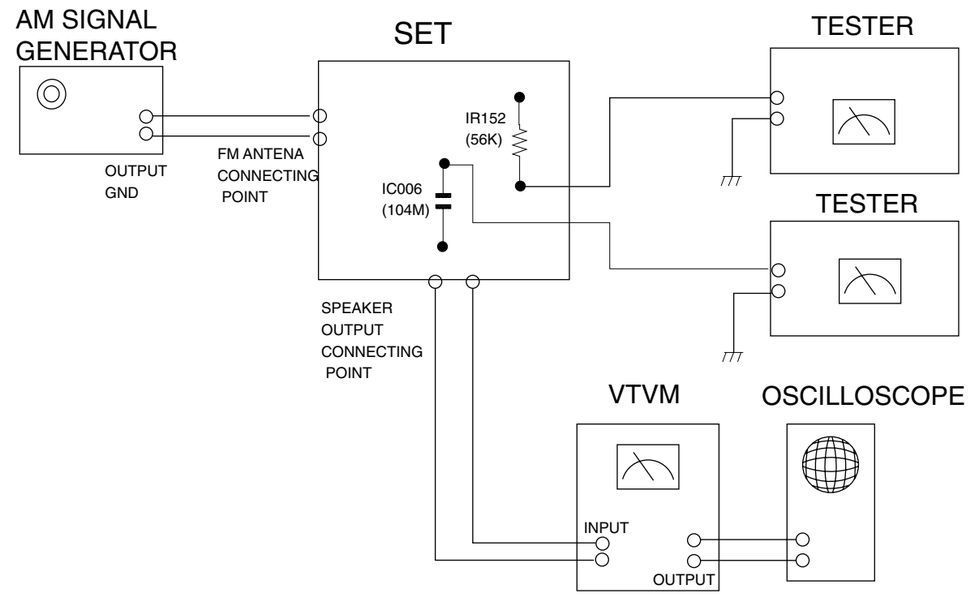

Fig 1-2

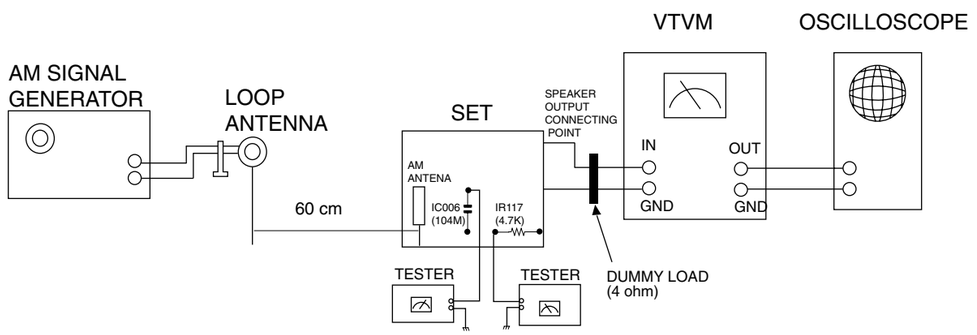

Fig 1-3

1-3. Tape section

1-3-1. Recording BIAS adjustment

1) Connect frequency counter toTP2(See Fig.1-4)and press the Record button.
2) Adjust SFT1(BIAS OSC COIL) until frequency counter reads 63~63.5KHz on mono FM mode .(MTT-5512)

1-3-2. Tape AZIMUTH adjustment

1) Connect the equipments as per Fig.1-6 to adjust the tape azimuth with test tape (recorded at 8KHz : MTT-113CN)
2) Play the test tape after inserting in DECK.
3) Adjust the azimuth ajustment screw of left side of record/play head for maximum output and for the same channel phase. (see Fig.1-5)

1-3-3. Tape speed adjustment

1) Connect the equipments as shown in Fig.1-6 adjust SVR3 the tape speed with test tape (recorded at 3KHz±10Hz: MTT-111N)

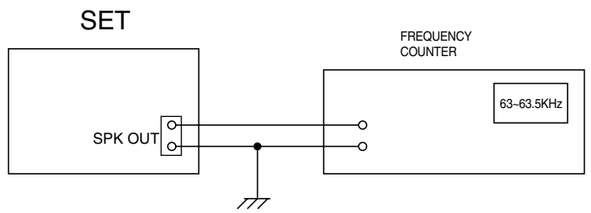

Fig.1-4 Recording bias adjustment

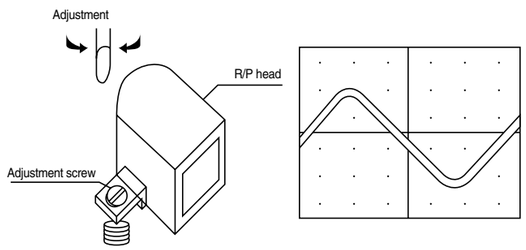

Fig.1-5 Azimuth speed adjustment

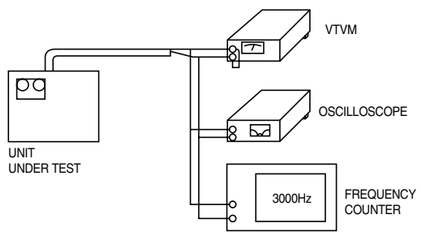

Fig.1-6

2.Exploded Views and Parts List

2-1 Cassette Deck :Yanion Cassette Deck (Auto Stop)

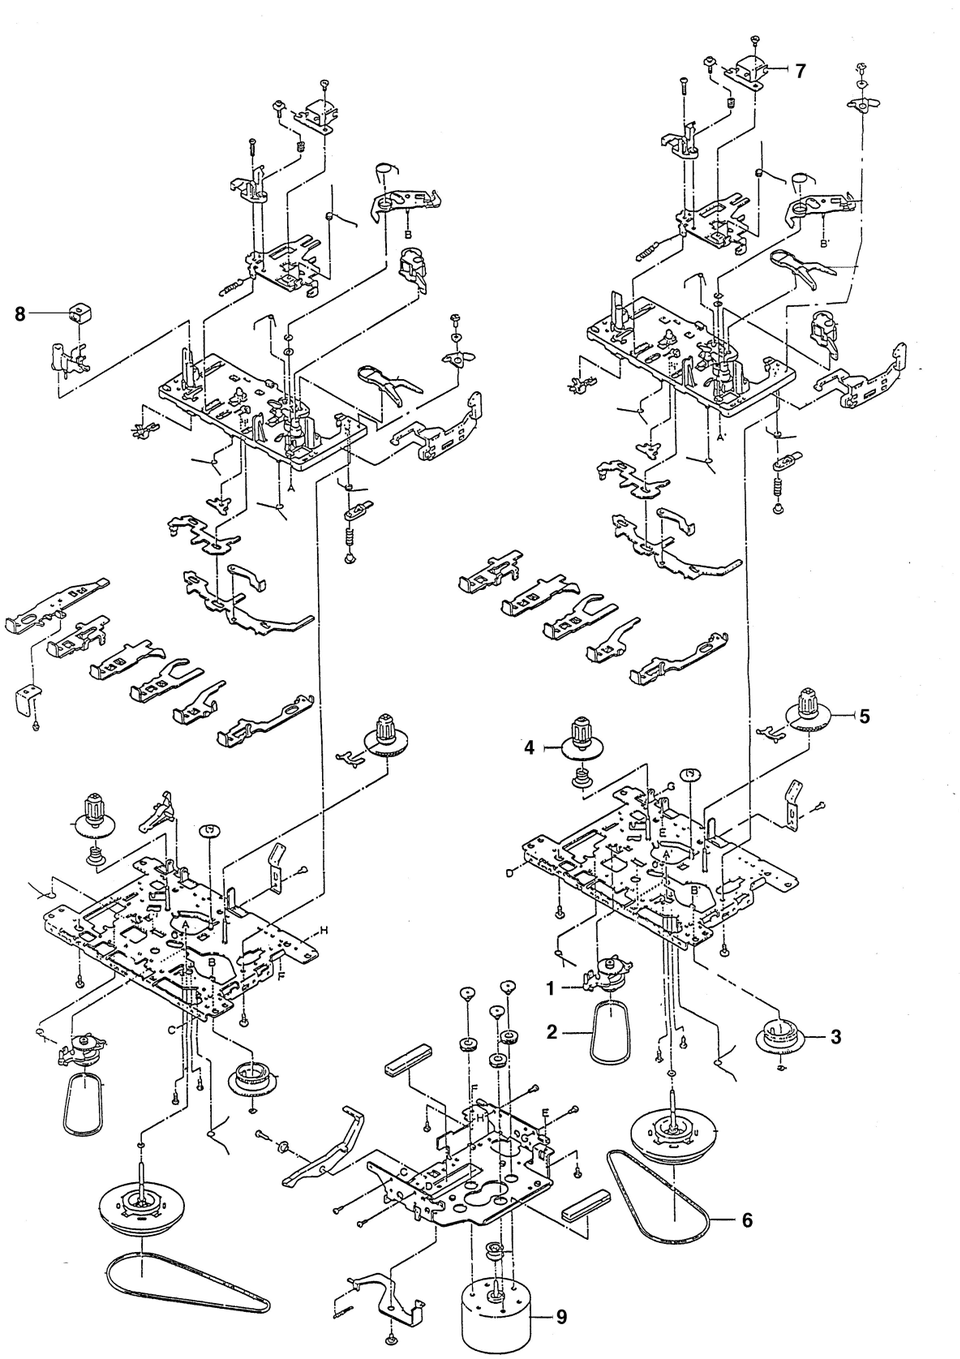

No.	Code No.	Description	Specification	Remarks
	AH59-20005X	DECK-CASSETTE	YN21ZSW-77	
1	AH81-11037D	R.F PULLEY ASS'Y	8521-200090-300	
2	AH81-11154D	BELT SUB	6600-090014-001	
3	AH81-11037H	CAM GEAR	6021-200802-001	
4	AH81-11037J	S REEL ASS'Y	8521-200080-300	
5	AH81-11037K	T REEL ASS'Y	8521-200070-300	
6	AH81-11154E	BELT MAIN	6600-090020-001	
7	AH81-11150W	R/P HEAD	TC-591	
8	AH81-11150X	ERASE HEAD	TC-230AN	
9	AH81-11037Q	MOTOR	EG530YD2BH	

2-2 Yanion Cassette Deck (Auto Reverse)

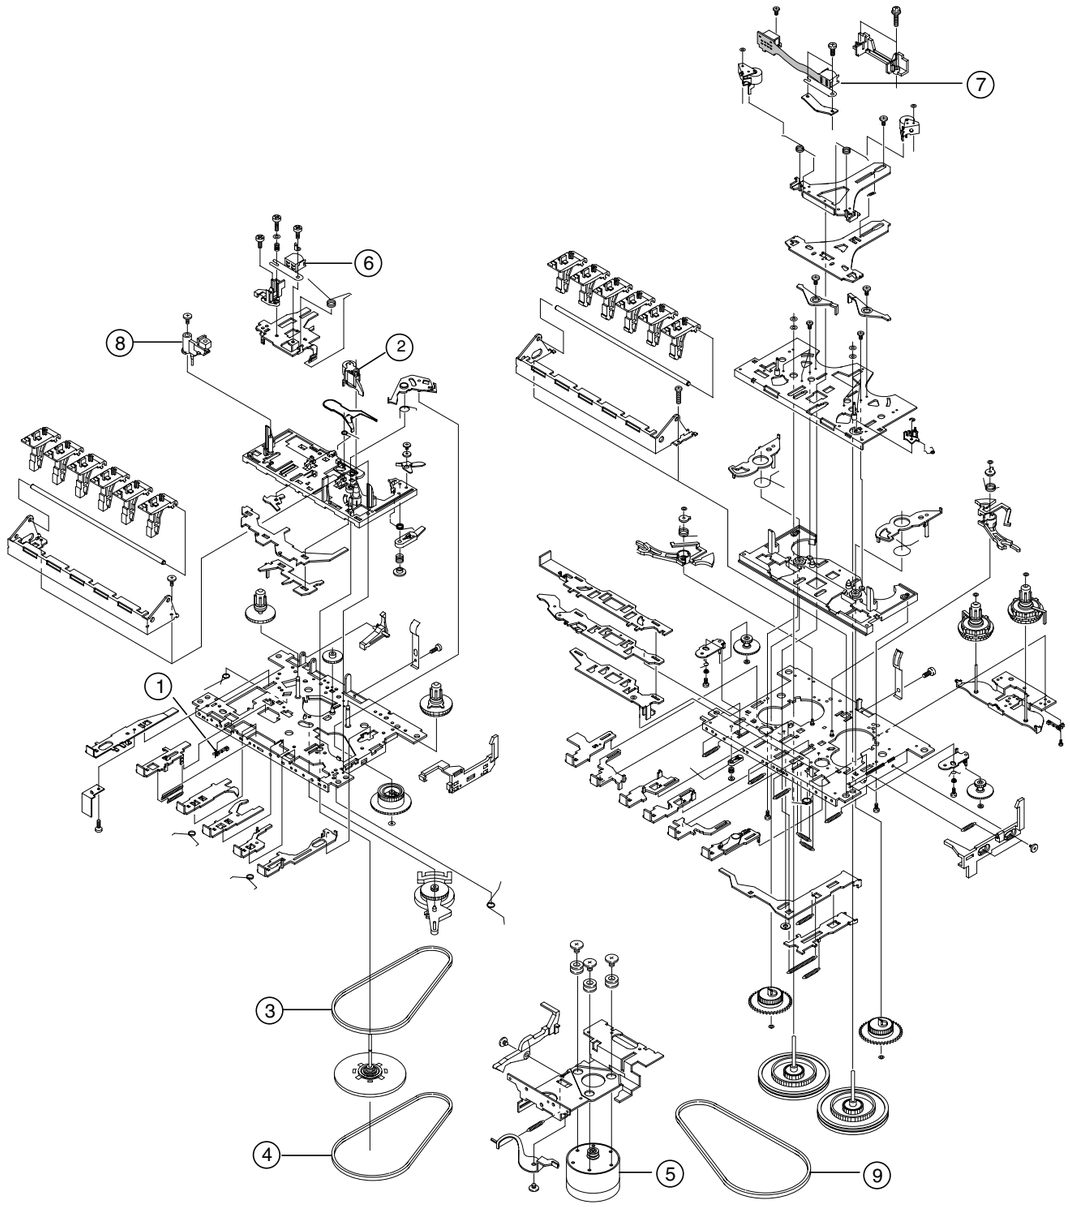

No.	Code No.	Description	Specification	Remarks
	AH59-20004E	TAPE DECK ASS'Y	YN921ZSW-41	
1	AH81-10005W	LEAF SWITCH	MSW-1541T	
2	AH81-10005Z	PINCH ROLLER ARM ASS'Y	1921-04-301	
3	AH81-10006C	RF BLET	1921-07-03	
4	AH81-10006R	MAIN BELT	1821-12-173	
5	AH81-11037Q	MOTOR	EG530YD2B	
6	AH81-10022E	R/P HEAD	MS15R-AA2N1	
7	AH81-10022H	P/B HEAD	MR359-KF243	
8	AH81-10022T	E-HEAD	PHK380-MS16A	
9	AH81-10023W	MAIN BELT	1821-17-03	

2-3 Total Exploded View and Parts List

2-3-1 Total Exploded

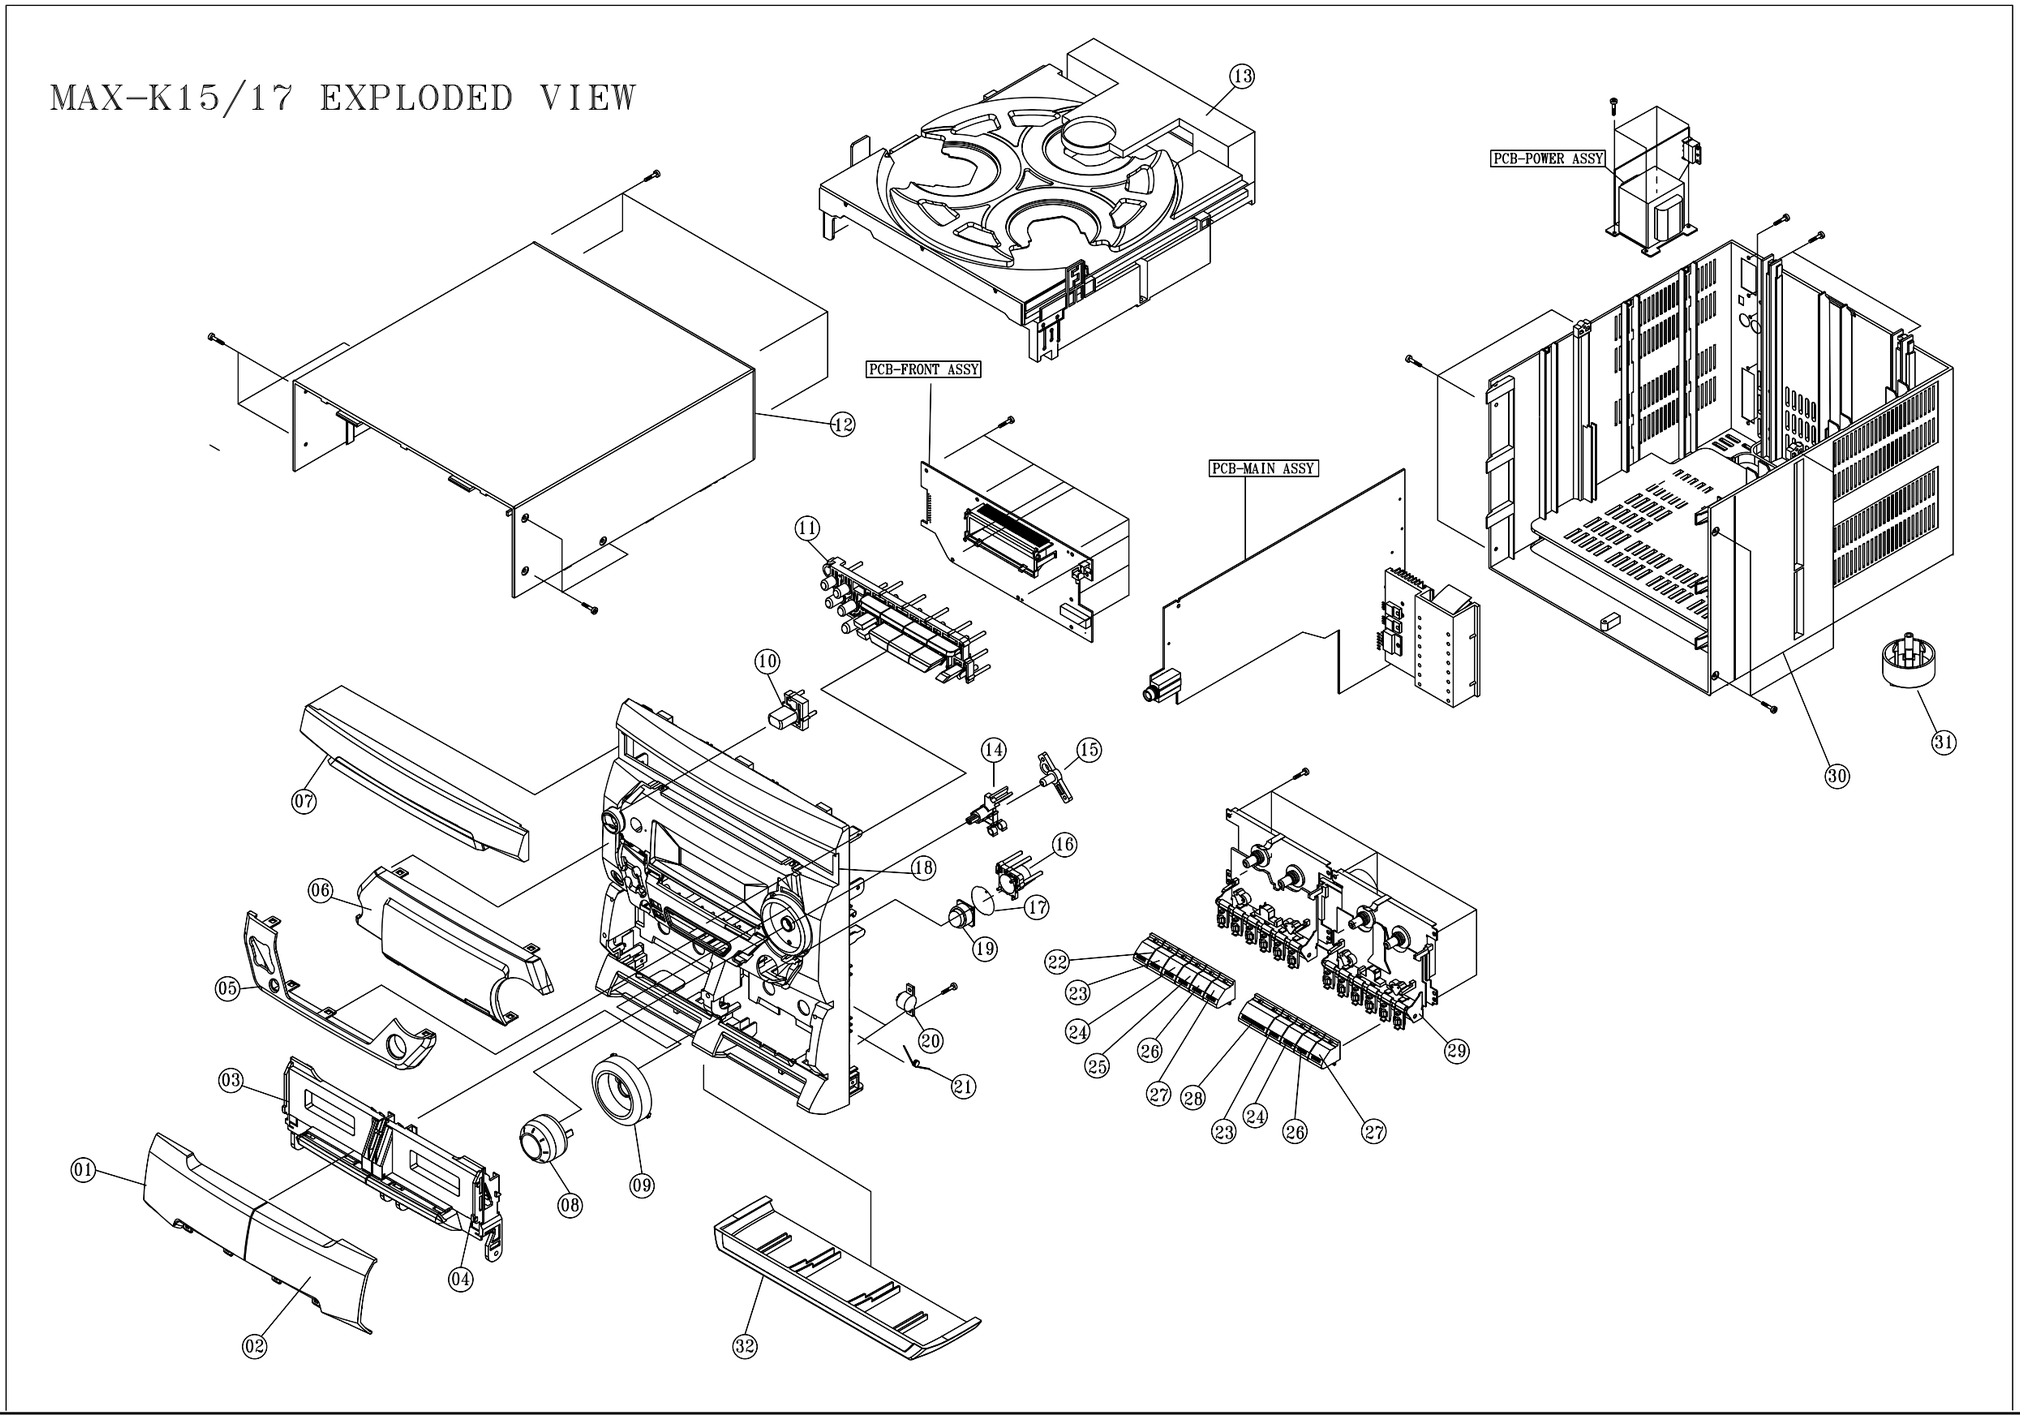

2-3-2 Parts List of Total Exploded view

No.	Code No.	Description	Specification	Remarks
1	AH64-00337A	WINDOW—CASSETTE L	-,PMMA SMOKE,-,-,-,-,MAXK15/18	
2	AH64-00338A	WINDOW—CASSETTE R	-,PMMA SMOKE,-,-,-,-,MAXK15/18	
3	AH64-00332A	DOOR—CASSETTE L	-,ABS 94HB,-,-,-,-,-,MAXK15/18	
4	AH64-00333A	DOOR—CASSETTE R	-,ABS 94HB,-,-,-,-,-,MAXK15/18	
5	AH64-00335A	DECORATION-FRONT	-,ABS,-,-,-,-,MAXK15/18	
6	AH64-00336A	WINDOW—LCD	-,PMMA SMOKE,-,-,-,-,MAXK15/18	
7	AH64-00334A	DOOR—CD	-,ABS 94HB,-,-,-,-,-,MAXK15/18	
8	AH64-00341A	KNOB-VOLUME	-,ABS,-,-,-,MAXK15/18	
9	AH64-00346A	DECORATION-VOLUME	-,ABS 94,-,-,SIL,-,MAXK15/18	
10	AH64-00342A	KNOB-POWER	-,ABS,-,-,-,MAXK15/18	
11	AH64-00343A	KNOB—MAIN	-,ABS,-,-,-,AMXK15/18	
12	AH64-00339A	CABINET-TOP	-,MIPS,-,-,-,D/GRAY,-,MAXK15/18	
13	AJ59-20150T	DECK-CDP	CMS-300,-,-,-,-	
14	AH61-00227A	BRACKET-VOLUME	-,ABS BLK,-,-,-,-,MAXK15/18,-	
15	AH61-00228A	BRACKET-PIVOT VOL	-,ABS BLK,-,-,-,-,MAXK15/18,-	
16	AH61-00229A	HOLDER—P SOUND	-,ABS WHITE,-,-,-,MAXK15/18	
17	AH63-00122A	FILTER-P SOUND	-,PC WHITE,-,-,-,MAXK15/18	
18	AH67-00029A	LENS— P SOUND	-,-,PMMA CLEAR,-,-,-,MAXK15/18	
19	AH64-00331A	CABINET-FRONT	-,MIPS,-,-,-,SIL,-,MAX-K15	
20	AH61-80030A	DAMPER-ASSY	-,POM,M0.8,G130,BLK,-,MAX-630	
21	AH61-00013A	SPRING—EJECT	-,-,SUS PI1.0,-,-,-,MAX900	
22	AH64-00344A	KNOB—DECK S	-,ABS,-,-,-,MAXK15/18	
23	AH64-00344B	KNOB—DECK S	-,ABS,-,-,-,MAXK15/18,PLAY S	
24	AH64-00344C	KNOB—DECK S	-,ABS,-,-,-,MAXK15/18,REWIND	
25	AH64-00344D	KNOB—DECK S	-,ABS,-,-,-,MAXK15/18,F.F	
26	AH64-00344E	KNOB—DECK S	-,ABS,-,-,-,MAXK15/18,DECK ST/EJ	
27	AH64-00344F	KNOB—DECK S	-,ABS,-,-,-,MAXK15/18,DECK PAUSE	
28	AH64-00345A	KNOB—DECK L	-,ABS,-,-,-,MAXK15/18	
29	AH59-20005X	CASSETTE-DECK	YN21SW-77	
29	AH59-20004E	DECK-CASSETTE	YN921ZSW-49	
30	AH64-00340A	CABINET—BOTTOM	-,MIPS 94HB,-,-,-,-,-,MAXK15/18	
31	AH61-00254A	HOLDER-FOOT	-,ABS 94HB,-,-,-,-,-,MAXK15/18	K17
32	AH64-40470A	DECO-FOOT	-,ABS 94HB,-,-,-,-,-,MAXK15/18	K17
33	AH64-00344G	KNOB—DECK S	-,ABS,-,-,-,MAXK15/18,DECK MODE	K17 KOR
34	AH64-00344H	KNOB—DECK L	,ABS,-,-,-,MAXK15/18,DECK A/V PLAY	K17 KOR
35	AH64-00344J	KNOB—DECK S	,ABS,-,-,-,MAXK15/18,DECK DIR	K17 KOR

2-4 CD Deck Exploded View and Parts list

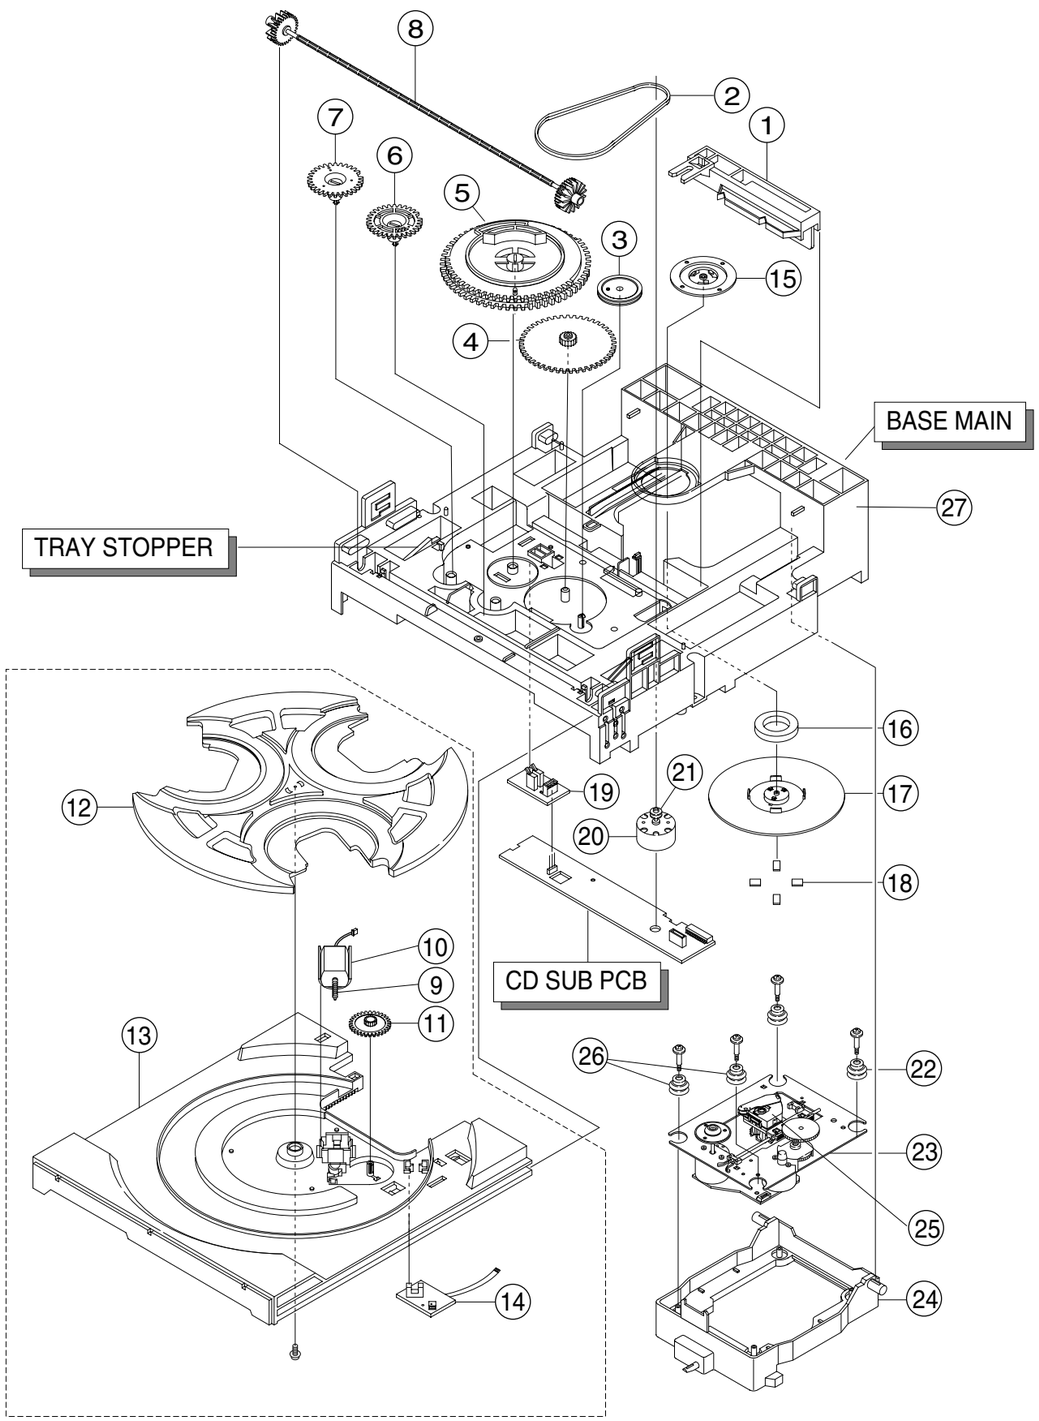

No.	Code No.	Description	Specification	Remarks
	AJ59-20150T	ASS'Y-DECK	CMS-300	
1	AH66-80022A	SLIDER-CAM	ABS HF-380 NTR	
2	AH66-60034A	BELT-LOAD	CR	
3	AH66-20186A	GEAR-PULLEY	POM (M90-44) WHT	
4	AH66-20187A	GEAR-LOAD	POM (M90-44) BLK	
5	AH66-20188A	GEAR-CAM	POM (M90-44) WHT	
6	AH66-20189A	GEAR-TRAY	POM (M90-44) BLK	
7	AH66-20190A	GEAR-CONVERT	POM (M90-44) WHT	
8	AH66-20191A	GEAR-SYNCRO	ABS HF-380 NTR	
9	AH66-20192A	GEAR-WORM	POM(M90-44),M0.5,PCD4.5	
10	AH31-12001A	MOTOR-LOADING	FF-030PN-09120	
11	AH66-20193A	GEAR-ROULLETE	POM(M90-44) BLK	
12	AH66-90056A	TRAY-ROULLETE	ABS XR-401 BLK	
13	AH66-90055A	TRAY-DISC	ABS BLK	
14	AH59-10099A	ASSY-PCB SENSOR	CMS-300,ASSY SENSOR	
15	AH61-00225A	BRKT-CHUCK	SECC T0.8,CMS-300	
16	3302-000159	MAGNET-CHUCK	AC,3500-3800G,2.6-3.2MGOe,30	
17	AH66-90057A	TABLE-CHUCK	,ABS,BLK,CMS-300	
18	AH69-20342B	SHEET-CHUCK	SHEET,HYMERON,BLK,0.4T	
19	AH59-10102A	ASSY-PCB SW	CMS-300,ASSY SW	
20	AH31-10021A	MOTOR-DC	RF-500TB,9VDC/130MA	
21	AH66-10008A	PULLEY-MOTOR	POM,BLK,CMS-CR3	
22	AH73-10031A	RUBBER-CD(R)	SI,CMS-300,40,RED	
23	AH91-60150A	CDP DECK ASSY	CMS-D50SG6,CMS-300D	
24	AH66-30098A	LEVER-LIFTER	ABS BLK CMS-300	
25	AH30-00003A	PICK-UP	SOH-AA,D51SG6(W/D/CO)	
26	AH73-10034A	RUBBER-CD(G)	SI,CMS-300,40,GREEN	
27	AH61-20428A	BASE-MAIN	ABS,BLK,CMS-300	

2-5 SPEAKER Exploded View and Parts list

2-5-1 MAX-K15

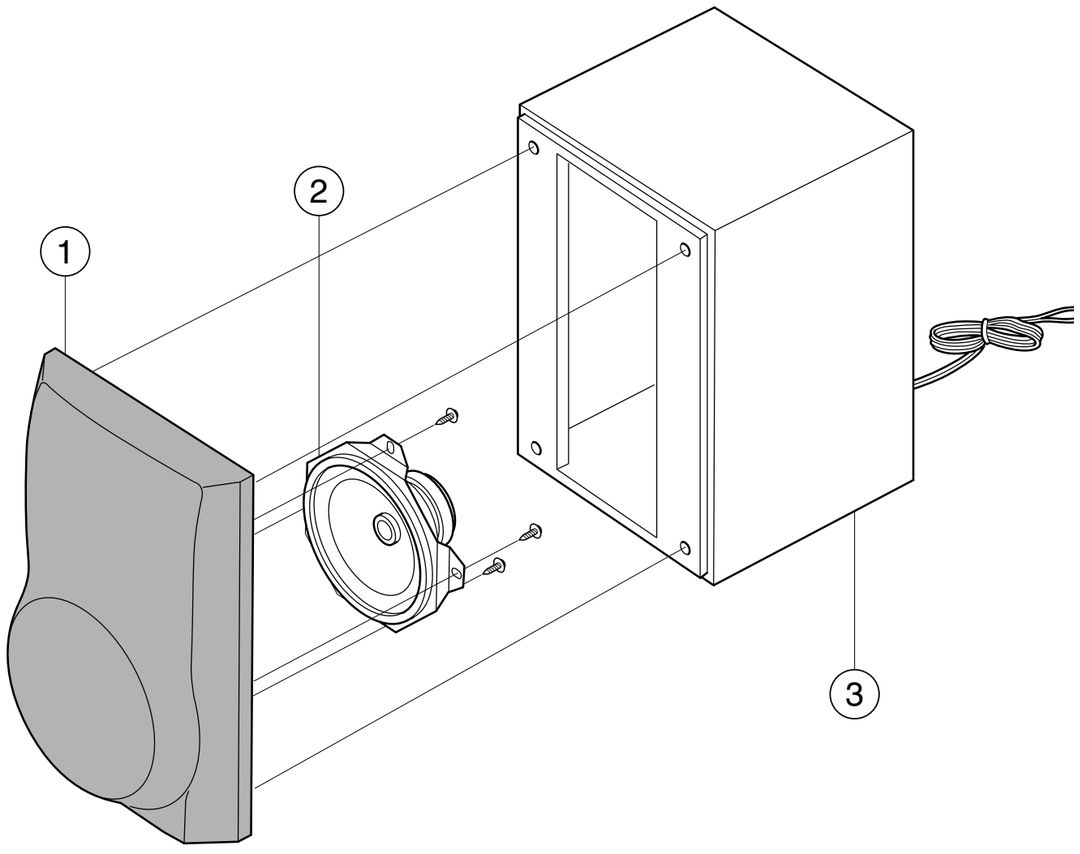

No	PS K15 (AH81-00107A)	
	Code No	Description
1	AH81-00104E	FRONT PANEL ASS'Y
2	AH81-00107C	UNIT W/F 4"
3	AH81-00107B	WOODEN CABINET

* CAUSION : It is used the bonding, connet FRONT PANEL to CABINET ASS'Y.
So when the disassembly, take extreme care not to demage the SPEAKER.

2-5-2 MAX-K17

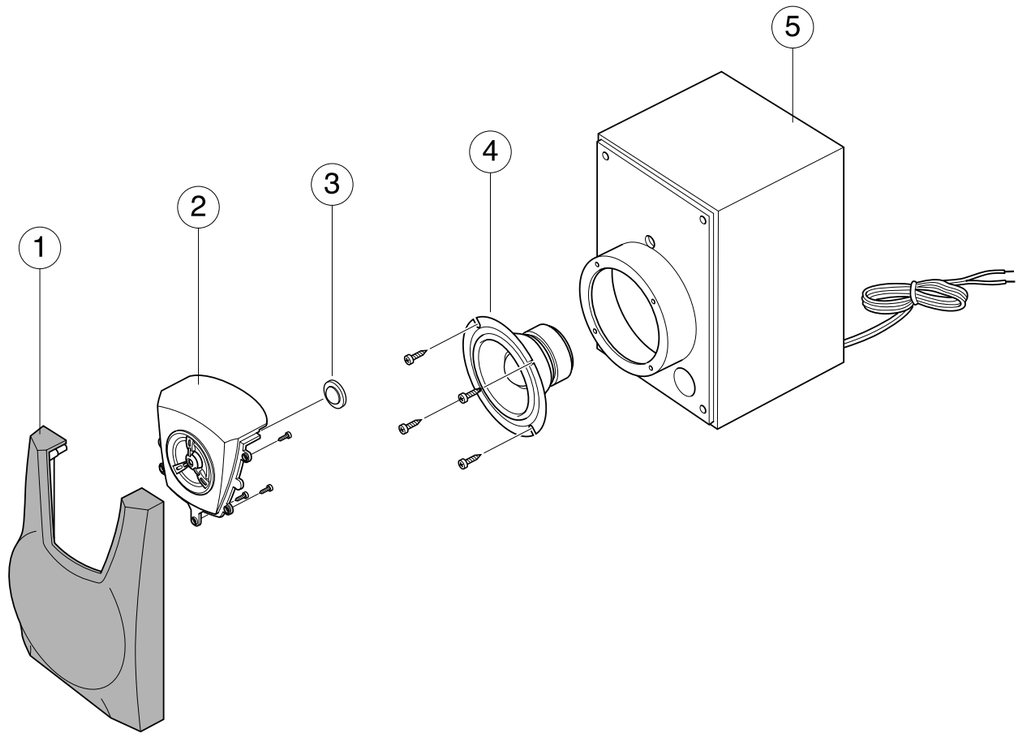

* PS920 : ASS'Y SPEAKER(AH81-00078A)

No.	Description	Specification	Code No.	Q'TY
1	NET	HIPS BLK	AH81-00078E	1
2	PANEL FRONT	HIPS L/GRAY	AH81-00078C	1
3	PIEZO CAP		AH81-00078K	1
4	UNIT W/F	5 1/4″	AH81-00078G	1
5	CABINET ASS'Y		AH81-00078F	1

* CAUSION : It is used the bonding, connet NET FRAME to CABINET ASS'Y.
So when the disassembly, take extreme care not to demage the SPEAKER.

3. Electrical Parts List

*S.N.A. : Service Not Available

Location no.	Code no.	Description & Specifiation	Remarks

**** MAX-K15 Parts List ****

	AH26-00042A	TRANS-POWER;-,-,-,110/220V,60/50HZ,-,PCD790
	AH39-10002L	POWER CORD;CP2,KLCE-2F,2.15M,5239,VDE
	AH42-20001Q	ANT-LOOP;-,KS980214-01,18.5uH,CONNECTOR
	AH59-00048A	REMOCON—ASSY;-,-,-,22KEY,MAXK15/N25,-

AH92-00295B ASSY PCB;MAXK15QH,OIRT S.N.A.

ID1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID10	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID13	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID14	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID15	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID16	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD301	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD305	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD308	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD311	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD321	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD323	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD332	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD302	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
JD303	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
QD603	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
QD604	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD701	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD702	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD703	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
QZD001	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50
RZD702	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41
RZD701	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41
QZD601	0403-000398	DIODE-ZENER;UZP8.2B,8.2V,7.7-8.7V,1W,DO-41
RZD703	0403-000399	DIODE-ZENER;UZP9.1B,8.5-9.6V,1W,DO-41,TP
JQ304	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120
JQ602	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120
JQ603	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120
QQ604	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,TP,120-
JQ306	0501-000394	TR-SMALL SIGNAL;KSC900-L,NPN,250mW,TO-92,-,350
IQ11	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
IQ12	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
IQ13	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
JQ307	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
JQ308	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
RQ701	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
RQ703	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160
IQ1	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
IQ15	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
QQ603	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
QQ605	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
QQ606	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
RQ704	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
RQ707	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
JQ301	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,
JQ309	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,
JQ605	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP
RQ706	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP
QR616	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm
JR316	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR328	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR337	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR338	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR339	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR602	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR611	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR612	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
RR786	2001-000036	R-CARBON;330OHM,5%,1/4W,AA,TP,2.4X6.4MM
RR791	2001-000036	R-CARBON;330OHM,5%,1/4W,AA,TP,2.4X6.4MM
RR713	2001-000055	R-CARBON;4.7Kohm,5%,1/4W,AA,TP,2.4x6.4m
IR090	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR147	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR104	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM
IR149	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM
QR119	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM
QR620	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM
IR111	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR112	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR118	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR122	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR13	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR148	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR340	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR341	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR342	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR329	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR333	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR355	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR356	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR151	2001-000356	R-CARBON;150KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR603	2001-000356	R-CARBON;150KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR615	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM
IR099	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR007	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR008	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR141	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR142	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR002	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR343	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR381	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR601	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR607	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR609	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
RR705	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
RR712	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR020	2001-000435	R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR304	2001-000435	R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR345	2001-000435	R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR025	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR027	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR120	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR001	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR005	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR310	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR315	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR319	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR382	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR617	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR144	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM
QR001	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM
JR335	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR380	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR383	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM
RR714	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR001	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM
JR312	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM
JR324	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM
JR334	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM
JR327	2001-000552	R-CARBON;270OHM,5%,1/4W,AA,TP,2.4X6.4MM
IR110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM
RR707	2001-000587	R-CARBON;3.3KOHM,5%,1/2W,AA,TP,3.3X9MM
RR715	2001-000587	R-CARBON;3.3KOHM,5%,1/2W,AA,TP,3.3X9MM
JR302	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR348	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR119	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR121	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR123	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR153	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM
RR706	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR101	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR108	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR313	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR323	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR109	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR611	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR612	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR630	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR350	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM
IR117	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR145	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR150	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR306	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR321	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR322	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM
RR701	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM
RR702	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR320	2001-000773	R-CARBON;470KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR146	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM
JR308	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR317	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR604	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR002	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM
IR106	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
IR107	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
JR309	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
JR326	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
JR330	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
JR331	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
JR357	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
QR622	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM
QR623	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM
IR15	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM
IR152	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM

Location no.	Code no.	Description & Specifiation	Remarks
JR381	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR608	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR610	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR103	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR314	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR325	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR3	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR4	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR703	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR704	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR311	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR326	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR351	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR143	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR347	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR354	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR301	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR349	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR785	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4MM	
RR787	2001-001138	R-CARBON(S);390ohm,5%,1/2W,AA,TP,2.4x6.4mm	
RR789	2001-001138	R-CARBON(S);390ohm,5%,1/2W,AA,TP,2.4x6.4mm	
QR613	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4MM	
QR614	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4MM	
QR618	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4MM	
QR621	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4MM	
SVR3	2103-000341	VR-SEMI;2Kohm,30%,1/10W,TOP	
IC002	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC23	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC43	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC51	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC53	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC86	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC001	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC306	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC326	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC327	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC334	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC335	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC347	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC348	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC352	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
RC705	2201-000163	C-CERAMIC,DISC;10nF,+80-20%,50V,Y5V,TP,7x3,2.5	
IC15	2201-000202	C-CERAMIC,DISC;10pF,5%,50V,NPO,TP,5.0*3.0,2.5	
IC33	2201-000202	C-CERAMIC,DISC;10pF,5%,50V,NPO,TP,5.0*3.0,2.5	
IC95	2201-000202	C-CERAMIC,DISC;10pF,5%,50V,NPO,TP,5.0*3.0,2.5	
IC3	2201-000204	C-CERAMIC,DISC;10pF,5%,50V,RH,5.0*3.0,5MM,TP	
IC37	2201-000223	C-CERAMIC,DISC;12pF,5%,50V,CH,TP,5x3,5.0	
JC003	2201-000231	C-CERAMIC,DISC;150pF,10%,50V,SL,TP,6x3.5	
JC004	2201-000231	C-CERAMIC,DISC;150pF,10%,50V,SL,TP,6x3.5	
IC16	2201-000338	C-CERAMIC,DISC;2.2NF,20%,50V,Y5T,TP,5.0X3.0,5	
IC17	2201-000338	C-CERAMIC,DISC;2.2NF,20%,50V,Y5T,TP,5.0X3.0,5	
IC27	2201-000368	C-CERAMIC,DISC;220PF,10%,50V,SL,TP,6.5X3.0,5	
RC010	2201-000368	C-CERAMIC,DISC;220PF,10%,50V,SL,TP,6.5X3.0,5	
RC712	2201-000368	C-CERAMIC,DISC;220PF,10%,50V,SL,TP,6.5X3.0,5	
JC358	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
JC386	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
IC32	2201-000389	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3,5	
IC39	2201-000411	C-CERAMIC,DISC;270pF,10%,50V,SL,TP,6.5X3	
IC14	2201-000432	C-CERAMIC,DISC;2pF,0.3pF,50V,CH,TP,5.0x3.5,5	
IC31	2201-000487	C-CERAMIC,DISC;33pF,5%,50V,SL,TP,5x3,5m	
IC2	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,14x3,5	
QC608	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,14x3,5	
QC614	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,14x3,5	
IC87	2201-000557	C-CERAMIC,DISC;0.47nF,10%,50V,SL,TP,8x3.5,5	
JC310	2201-000557	C-CERAMIC,DISC;0.47nF,10%,50V,SL,TP,8x3.5,5	
JC354	2201-000557	C-CERAMIC,DISC;0.47nF,10%,50V,SL,TP,8x3.5,5	
IC44	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
IC59	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
JC302	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
JC317	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
JC319	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
JC385	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
QC020	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
QC21	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
RC710	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
RC712	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
IC36	2201-000573	C-CERAMIC,DISC;0.047nF,5%,50V,NP0,TP,5x3.5,5	
IC83	2201-000576	C-CERAMIC,DISC;0.047nF,5%,50V,SL,TP,5x3.2.5	
IC57	2201-000582	C-CERAMIC,DISC;0.004nF,0.25pF,50V,NP0,TP,4x3.5,5	
IC12	2201-000666	C-CERAMIC,DISC;7PF,0.5PF,50V,CH,TP,5X3,5	
IC81	2201-000666	C-CERAMIC,DISC;7PF,0.5PF,50V,CH,TP,5X3,5	
IC007	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC098	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC10	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC104	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC34	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC38	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC85	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC97	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC18	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC19	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC6	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC617	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC7	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	

Location no.	Code no.	Description & Specifiation	Remarks
IC009	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
IC011	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC002	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC340	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC351	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC356	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC357	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC401	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
IC010	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
IC020	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
QC611	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
QC612	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
QC1	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
QC2	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
JC343	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
JC345	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
JC318	2202-000819	C-CERAMIC,MLC-AXIAL;47NF,+80-20%,50V,Y5V,TP,3.5X19	
QC20	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
QC5	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
QC603	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
QC619	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
IC41	2202-000850	C-CERAMIC,MLC-AXIAL;2.2NF,30%,16V,Y5R,TP,3.5X1.9,-	
JC323	2301-000365	C-FILM,PEF;1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
JC330	2301-000365	C-FILM,PEF;1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
JC338	2301-000365	C-FILM,PEF;1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
JC329	2301-000370	C-FILM,PEF;1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
JC339	2301-000370	C-FILM,PEF;1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
IC006	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
QC604	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
QC605	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
JC320	2301-000379	C-FILM,PEF;10NF,10%,50V,TP,6X7X3.2MM,5MM	
JC322	2301-000379	C-FILM,PEF;10NF,10%,50V,TP,6X7X3.2MM,5MM	
JC325	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
JC342	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
IC4	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
IC5	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
JC332	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
JC340	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
JR352	2301-000404	C-FILM,PEF;2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
IC40	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
JC337	2301-000442	C-FILM,PEF;4.7nF,10%,50V,TP,5.5x7x3mm,5mm	
JC352	2301-000442	C-FILM,PEF;4.7nF,10%,50V,TP,5.5x7x3mm,5mm	
IC8	2301-000462	C-FILM,PEF;6.8NF,10%,50V,TP,6X12X3,3.5MM	
IC7	2301-000470	C-FILM,PEF;68NF,5%,50V,TP,10X12.5X5.5,7MM	
JC344	2301-000474	C-FILM,PEF;8.2NF,10%,50V,TP,6.5X12X3.5,3.	
JC578	2301-000474	C-FILM,PEF;8.2NF,10%,50V,TP,6.5X12X3.5,3.	
IC28	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
UC4	2401-000243	C-AL;100uF,20%,10V,GP,TP,6.3x5,5	
IC35	2401-000303	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
JC381	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
JC382	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
QC001	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
RC711	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
RC712	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
RC784	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
RC708	2401-000970	C-AL;22UF,20%,50V,WT,TP,5X11,2MM	
JC301	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC304	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC307	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC309	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC324	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC336	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC337	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC341	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC346	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC353	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
QC620	2401-001092	C-AL;330UF,20%,10V,GP,-,8X11.5,2.5M	
QC606	2401-001355	C-AL;470UF,20%,10V,GP,-,8X11.5,5MM	
QC613	2401-001355	C-AL;470UF,20%,10V,GP,-,8X11.5,5MM	
JC306	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
JC333	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
JC351	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
JC359	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
QC630	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
IC50	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
RC780	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
JC313	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
IC11	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
IC42	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
IC86	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
JC321	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
IC008	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
IC27	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
JC380	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
JC586	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
QC602	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
QC618	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
QC101	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
QC4	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
IC1	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
IC9	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
QC10	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC11	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC12	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	

Location no.	Code no.	Description & Specifiation	Remarks
QC13	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC14	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC15	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC16	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC17	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC8	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC9	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
JC303	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
JC313	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
JC383(MANU	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
RC783	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
QL601	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
QL606	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
JL332	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
-	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
RF703*2	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
	AH94-00223A	**ASSY-MANU-MAIN;MAXK15**	**S.N.A.**
RD704	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD705	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD706	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD707	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD711	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD712	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD713	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD714	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RQ708	0502-000425	TR-POWER;2SD2395-F,NPN,2W,TO-220FN,BK,1	
IQ099	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP	
MIC1	1201-000358	IC-PREAMP;22291,DIP,24P,-,DUAL,-,PLASTIC	
MIC10	1201-001454	IC-POWER AMP;7499,ZIP,11P,-,-,-,PLASTIC,18V,23W,0TO+7	
MIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.1,PLASTIC,1	
-	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD704*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD705*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD706*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD707*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD711*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD712*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD713*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD714*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RR780*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RR781*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RC706	2401-001052	C-AL;3300uF,20%,25V,GP,-,16x31.5,7.	
TCF5	2903-000119	FILTER-CERAMIC;SFE10.7MJA-10-A	
RF703	3601-000184	FUSE-FERRULE;250V,160MA,TIME LAG,GLASS,5X20	
MWF3	3711-000733	CONNECTOR-HEADER;BOX,17P,1R,2.5MM,STRAIGHT,SN	
ACW2	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
FJ2	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
MWF4	3711-002809	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
MWF1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
AJ1	3716-000209	TERMINAL-BLOCK;-,-,-60V,7A	
MJ4	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
MIC8	AC14-12001G	IC;KA78L05,T,-	
SFT1	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
SL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
SL3	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
MWF5	AH39-20008P	LEAD-CONNECTOR ASS'Y;5264,5395,2P,250MM,1007#26	
FREE	AH62-00018A	HEAT SINK—MAIN;-,AL EXTR,-,-,-,-,-,MAXK15	
	AH94-00224C	**ASSY AUTO FRONT TAPG**	**S.N.A.**
UD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD4	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD5	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD7	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UZD1	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO-41	
UQ4	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1W,TO-92L-,120-	
UQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ3	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP	
ULCD1	0601-001232	LED;TR,LED,1PCS,130-260%	
ULED2	0601-001232	LED;TR,LED,1PCS,130-260%	
UR020	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR110	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR104	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR111	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR142	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR144	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR105	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR112	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR021	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR116	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR119	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR120	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR121	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR122	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR117	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Location no.	Code no.	Description & Specifiation	Remarks
UR109	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR126	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR128	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR129	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR130	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR131	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR132	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR138	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR139	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR140	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR141	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR143	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR146	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR147	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR157	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR022	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR101	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR113	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR123	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR137	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR145	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR188	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR106	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR113	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR144	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR107	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR114	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR124	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR135	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR108	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR115	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR118	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR022	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UC12	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
UC8	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
UC13	2201-000423	C-CERAMIC,DISC;0.027nF,5%,50V,NP0,TP,5x3,2.5	
UC14	2201-000423	C-CERAMIC,DISC;0.027nF,5%,50V,NP0,TP,5x3,2.5	
UC1	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC10	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC18	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC19	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC2	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC6	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC18	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC7	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
UC4	2401-000244	C-AL;100uF,20%,10V,GP,TP,6.3x7,5	
UC9	2401-001355	C-AL;470UF,20%,10V,GP,-,8X11.5,5MM	
UC17	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
SW1	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW10	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW11	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW12	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW13	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW14	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW15	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW16	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW17	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW2	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW3	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW4	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW5	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW6	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW7	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW8	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW9	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
UIC2	1203-000276	IC-POSI.FIXED REG.;7805,TO-220,3P,-,PLASTIC,4.8/5	
UR220	2003-000710	R-METAL OXIDE(S);47ohm,5%,2W,AA,TP,4x12mm	
RC701	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
RC702	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,	
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM	
SW18	3404-000160	SWITCH-TACT;12V,50mA,160gf+-50gf,6.55x7.5x	
SW19	3404-000160	SWITCH-TACT;12V,50mA,160gf+-50gf,6.55x7.5x	
FCW2	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,	
FCW1	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN	
ACW1	3711-000190	CONNECTOR-HEADER;1WALL,2P,1R,7.92MM,STRAIGHT,SN	
LAMP1	4713-001130	LAMP-PILOT;6V,75mA,0.45W,BLUE,222Lm,-,3.9x7mm	
LAMP2	4713-001130	LAMP-PILOT;6V,75mA,0.45W,BLUE,222Lm,-,3.9x7mm	
LAMP3	4713-001130	LAMP-PILOT;6V,75mA,0.45W,BLUE,222Lm,-,3.9x7mm	
URV1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-	
LCD	AH07-00001A	LCD;-,-,MAX900,-	
UIC1	AH11-00006A	MASK-ROM;LC867232A-XXXX,100P,QFP,-,8,-	
RL701	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-	
RL702	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-	
	AH61-20550B	HOLDER-LCD;ABS 94HB,WHT,MAXK15/17	
H1	AH67-40044A	FILTER-LCD;-,PC,T0.5,-,MILKY,-,-,MAX900,-	
	AH94-00229B	**ASSY OPT MAIN MANU;OIRT BUYER,NO**	**S.N.A.**
TVD1	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S	
IVD1	0405-001076	DIODE-VARACTOR;KV1330NT,18V,100nA,TO-92,TP	
IVD3	0405-001076	DIODE-VARACTOR;KV1330NT,18V,100nA,TO-92,TP	
RR780	2003-000455	R-METAL OXIDE(S);100ohm,5%,2W,AA,TP,4x12mm	

Location no.	Code no.	Description & Specifiation	Remarks
RR781	2003-000455	R-METAL OXIDE(S);100ohm,5%,2W,AA,TP,4x12mm	
TX2	2801-003278	CRYSTAL-UNIT;4MHz,30ppm,28-AAM,20pF,100ohm,	
TCF4	2802-001124	RESONATOR-CERAMIC;18.95KHz,+-38Hz,BK,7x9x3.5mm	
TCF3	2903-001234	FILTER-CERAMIC;-,0.455MHz,-,7dB,1dB,BK,AHCFM2-455Z	
MIC6	AH14-10008G	IC—TUNER;U2514B,SSO,TUNER,28,-	
MIC7	AH14-10008H	IC—PLL;U4285BM,SSO,MAXK15,20P,-	
TL5	AH26-00047A	TRANS-IF;-,KS-75D,FM DET,-,7.6 x 7.6,-,10700KHz,-	
TL4	AH26-00047B	TRANS-IF;-,LKS-75D00-X000002-0,FM IFT,-,7.6 x 7.6	
TL4	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,	
TL6	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
TL11	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
TL9	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
TL10	AH27-00013A	COIL-OSC;LKS75M00-0060LMA-0,350UH,MW ANT	
TL2	AH27-00033A	COIL-OSC;LKS73AO-X000351-0,350UH,FM OSC	
TL1	AH27-90032F	COIL-SPRING;SP-1511,-,08¥Ö 2UEW,-,SPRING	
TCF6	AH29-00001A	FILTER—BPF;GFMB3-T,88~108MHZ,3DB MAX,-,TP	
DECKµGND	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
TP1	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
TP2	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
TP4	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
	G3V1-A	**G3VI;MAX940**	**S.N.A.**
	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
	AH92-00005A	**ASSY-PCB-CD MAIN;G3VI,CD PACK**	**S.N.A.**
NQ1502	0501-000314	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,TP,90-	
NIC928	0904-001442	IC-DSP;9286,8Bit,QFP,80P,-,16.9344MHz,TR,CMOS,P	
NIC925	1003-000179	IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE,-,ST,	
NIC922	1204-001286	IC-ASP;KB9223,QFP,80P,-,PLASTIC,6V,20	
NR109	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR203	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR300	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57L	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57R	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR606	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR602	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR603	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR104	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR107	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR100	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR120	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR121	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR204	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
FREE	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR103	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR119	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR400	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
NR115	2007-000444	R-CHIP;180KOHM,5%,1/10W,DA,TP,2012	
NR10	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR11	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR12	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR5	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54L	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54R	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR6	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR604	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR7	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR804	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR114	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
NR50L	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR50R	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR101	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP,2012	
NR200	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52L	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52R	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR201	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR202	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR105	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR995	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR996	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR997	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR998	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR53L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR53R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
SR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR117	2007-000898	R-CHIP;430Kohm,5%,1/10W,DA,TP,2012	
NR108	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR111	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR112	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012	
NR116	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012	
NR994	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
NR999	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
	2007-001216	R-CHIP;82OHM,5%,1/10W,DA,TP,2012	
NC107	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC108	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC119	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC121	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	

Location no.	Code no.	Description & Specifiation	Remarks
NC600	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC901	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC112	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC113	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC116	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC205	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC502	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC503	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC504	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC53L	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC53R	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC602	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC800	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC804	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC905	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
SC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
SC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
SC6	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC190	2203-000335	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,2012	
NC190	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,2012	
NC117	2203-000477	C-CERAMIC,CHIP;1uF,+80-20%,16V,Y5V,TP,2012,-	
NC110	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
NC118	2203-000787	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
NC101	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
NC111	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
NC125	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
NC100	2203-000892	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,2012	
NC106	2203-000892	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,2012	
NC200	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
NC667	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
NC115	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2012,-	
NC104	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC52L	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC52R	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC603	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC903	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC102	2203-001551	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
NC201	2203-001551	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
NC202	2203-001619	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,2012	
NC203	2203-001619	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,2012	
NL105	3301-000325	CORE-FERRITE BEAD;AB,3.2x2.5x1.3mm,-,-	
	AH94-00012A	**ASSY-MANU-CD MAIN,G3VI;G3VI,CD PACK**	**S.N.A.**
SIC1	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
SIC2	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
NXF100	2802-000211	RESONATOR-CERAMIC;16.93MHZ,0.5%,TP,10.0X5.0X10.0	
SCW5	3708-001131	CONNECTOR-FPC/FC/PIC;5P,1.25mm,STRAIGHT,SN	
WCW1	3708-001252	CONNECTOR-FPC/FC/PIC;16P,1mm,STRAIGHT-F,SN	
SCW1	3708-001438	CONNECTOR-FPC/FC/PIC;22P,1.25mm,ANGLE,SN	
NCW500	3711-000906	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	
SCW7	3711-003379	CONNECTOR-HEADER;NOWALL,3P,1R,2.5mm,STRAIGHT,SN	
AµA'	3811-000121	WIRE-PVC CU;BCWA,300V,100MM,7/0.16MM,#26,B	
BµB'	3811-000121	WIRE-PVC CU;BCWA,300V,100MM,7/0.16MM,#26,B	
NCW101	AH39-20025S	LEAD-CONNECTOR,ASSY;-,51004-08,35023-08,8P,300MM,1	
NCW102	AH39-20561P	LEAD CONNECTOR-ASSY;-,5295,PHR,6P,150mm,1007#28	
ND200	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND202	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND203	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SZD1	0403-000352	DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500mW,DO	
SZD2	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50	
NQ1501	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SR1	2001-000027	R-CARBON;100OHM,5%,1/4W,AA,TP,2.4X6.4MM	
NR106	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR8	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR113	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR555	2008-000140	R-FUSIBLE;2.2OHM,5%,1/2W,AA,TP,3.5X9.4MM	
NC400	2202-000243	C-CERAMIC,MLC-AXIAL;33PF,5%,50V,SL,3.5X19,-,TP	
NC300	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
NC106	2202-000817	C-CERAMIC,MLC-AXIAL;4.7NF,20%,16V,Y5R,TP,3.5X19,-	
NC117	2301-000389	C-FILM,PEF;150nF,5%,50V,TP,12.5x15x7.5,7m	
NC105	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC501	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC702	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC904	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC14	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC114	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
NC301	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC700	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC701	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
SC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
NC703	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
NC124	2401-001324	C-AL;470nF,20%,50V,GP,BK,3x5,1mm	
NC204	2401-001324	C-AL;470nF,20%,50V,GP,BK,3x5,1mm	
NC666	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
NC122	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	

Location no.	Code no.	Description & Specifiation	Remarks
NC54	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NL101	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL102	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL100	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
SL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
NL300	3301-000297	CORE-FERRITE BEAD;AA,3.6x1.2x5.7mm,1400,2900G	
NL301	3301-000297	CORE-FERRITE BEAD;AA,3.6x1.2x5.7mm,1400,2900G	
NL302	3301-000297	CORE-FERRITE BEAD;AA,3.6x1.2x5.7mm,1400,2900G	
NIC05	AC14-12001G	IC;KA78L05,T,-	
SCO4	AC14-12001G	IC;KA78L05,T,-	

PSK15E/XFO SPEAKER-SYSTEM;MAXK15QH/XFO

AH81-00107A	A/S-;SPEAKER SYSTEM,PS K15	
AH81-00104E	A/S—PANEL PS K15;PANEL PS K15,PS K15	
AH81-00107B	A/S-PARTS-WOODEN CABINET;WOODEN CABINET,PS K15	
AH81-00107C	A/S-PARTS-UNIT WOOFER 4;UNIT WOOFER 4,PS K15	
AH81-00107D	A/S-PARTS-CORD ASS'Y;CORD ASS'Y,PS K15	

**** MAX-K17 Parts List ****

AH26-00043A	TRANS-POWER;-,-,-,110/220V,60/50HZ,-,PCD790	
AH39-10002L	POWER CORD;CP2,KLCE-2F,2.15M,5239,VDE	
AH42-20001Q	ANT-LOOP;-,KS980214-01,18.5uH,CONNECTOR	
AH59-00048A	REMOCON—ASSY;-,-,-,22KEY,MAXK15/N25,-	

AH92-00293C ASSY PCB;MAXK17QH/XFO S.N.A.

ID1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID10	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID13	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID14	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID15	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID16	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
ID9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD301	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD305	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD308	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD311	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD321	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD323	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD332	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
JD302	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
JD303	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
QD603	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
QD604	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD701	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD702	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD703	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD707	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
QZD001	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50
RZD702	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41
RZD701	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41
QZD601	0403-000398	DIODE-ZENER;UZP8.2B,8.2V,7.7-8.7V,1W,DO-41
IVD1	0405-001076	DIODE-VARACTOR;KV1330NT,18V,100nA,TO-92,TP
IVD3	0405-001076	DIODE-VARACTOR;KV1330NT,18V,100nA,TO-92,TP
JQ304	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120
JQ602	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120
JQ603	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120
QQ604	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,TP,120-
JQ306	0501-000394	TR-SMALL SIGNAL;KSC900-L,NPN,250mW,TO-92,-,350
IQ11	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
IQ12	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
IQ13	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
JQ307	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
JQ308	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
RQ701	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
RQ703	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160
RQ706	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160
IQ1	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
IQ15	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
QQ603	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
QQ605	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
QQ606	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
QQ704	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
RQ707	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP
JQ301	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,
JQ309	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,
JQ605	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP
QR615	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm
QR616	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm
JR316	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR328	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR337	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR338	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
JR339	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM
QR119	2001-000037	R-CARBON(S);330ohm,5%,1/2W,AA,TP,2.4x6.4mm
QR620	2001-000037	R-CARBON(S);330ohm,5%,1/2W,AA,TP,2.4x6.4mm

Location no.	Code no.	Description & Specifiation	Remarks
RR705	2001-000060	R-CARBON;6.8KOHM,5%,1/4W,AA,TP,2.4X6.4MM	
RR713	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
IR090	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR147	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR104	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR149	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR132	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR142	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR111	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR112	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR118	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR122	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR13	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR148	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR340	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR341	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR342	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR329	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR333	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR355	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR356	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR790	2001-000333	R-CARBON;12OHM,5%,1/4W,AA,TP,2.4X6.4MM	
RR795	2001-000333	R-CARBON;12OHM,5%,1/4W,AA,TP,2.4X6.4MM	
IR151	2001-000356	R-CARBON;150KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR099	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR007	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR008	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR141	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR142	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR002	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR343	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR381	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR601	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR607	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR609	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR020	2001-000435	R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR304	2001-000435	R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR345	2001-000435	R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR025	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR027	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR120	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR001	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR005	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR310	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR315	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR319	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR382	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR617	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR144	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR001	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR335	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR380	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR383	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR714	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR001	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR312	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR324	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR334	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR603	2001-000548	R-CARBON;270KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR707	2001-000587	R-CARBON;3.3KOHM,5%,1/2W,AA,TP,3.3X9MM	
RR715	2001-000587	R-CARBON;3.3KOHM,5%,1/2W,AA,TP,3.3X9MM	
JR302	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR348	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR119	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR121	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR123	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR153	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR706	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR101	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR108	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR313	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR323	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR109	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR611	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR612	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR604	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR630	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR350	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR117	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR145	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR150	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR306	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR321	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR322	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR701	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR702	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR712	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR320	2001-000773	R-CARBON;470KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR146	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR308	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Location no.	Code no.	Description & Specifiation	Remarks
JR317	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR106	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
IR107	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR309	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR326	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR330	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR331	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR357	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
QR622	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR623	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR15	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR152	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR381	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR602	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR608	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR610	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR103	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR314	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR325	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR3	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QR4	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR703	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR704	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR311	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR326	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR351	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR143	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR347	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR354	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR301	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR349	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR785	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4MM	
JR327	2001-001114	R-CARBON(S);270ohm,5%,1/2W,AA,TP,2.4x6.4mm	
RR787	2001-001138	R-CARBON(S);390ohm,5%,1/2W,AA,TP,2.4x6.4mm	
RR789	2001-001138	R-CARBON(S);390ohm,5%,1/2W,AA,TP,2.4x6.4mm	
QR613	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4MM	
QR614	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4MM	
QR618	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4MM	
QR621	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4MM	
RR780	2003-000701	R-METAL OXIDE(S);470ohm,5%,2W,AA,TP,4x12mm	
RR781	2003-000701	R-METAL OXIDE(S);470ohm,5%,2W,AA,TP,4x12mm	
RR786	2003-000798	R-METAL OXIDE(S);820OHM,5%,1W,AA,TP,3.3X9MM	
SVR3	2103-000341	VR-SEMI;2Kohm,30%,1/10W,TOP	
IC002	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC23	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC43	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC51	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC53	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
IC86	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC001	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC306	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC326	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC327	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC334	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC335	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC347	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC348	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
JC352	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
RC705	2201-000163	C-CERAMIC,DISC;10nF,+80-20%,50V,Y5V,TP,7x3,2.5	
IC15	2201-000202	C-CERAMIC,DISC;10pF,5%,50V,NPO,TP,5.0*3.0,2.5	
IC33	2201-000202	C-CERAMIC,DISC;10pF,5%,50V,NPO,TP,5.0*3.0,2.5	
IC95	2201-000202	C-CERAMIC,DISC;10pF,5%,50V,NPO,TP,5.0*3.0,2.5	
IC37	2201-000223	C-CERAMIC,DISC;12pF,5%,50V,CH,TP,5x3,5.0	
JC003	2201-000231	C-CERAMIC,DISC;150pF,10%,50V,SL,TP,6x3.5	
JC004	2201-000231	C-CERAMIC,DISC;150pF,10%,50V,SL,TP,6x3.5	
IC37	2201-000247	C-CERAMIC,DISC;0.015nF,5%,50V,NP0,TP,5x3,5	
IC16	2201-000338	C-CERAMIC,DISC;2.2NF,20%,50V,Y5T,TP,5.0X3.0,5	
IC17	2201-000338	C-CERAMIC,DISC;2.2NF,20%,50V,Y5T,TP,5.0X3.0,5	
IC27	2201-000368	C-CERAMIC,DISC;220PF,10%,50V,SL,TP,6.5X3.0,5	
RC010	2201-000368	C-CERAMIC,DISC;220PF,10%,50V,SL,TP,6.5X3.0,5	
JC358	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
JC386	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
IC32	2201-000389	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3,5	
IC39	2201-000411	C-CERAMIC,DISC;270pF,10%,50V,SL,TP,6.5X3	
IC14	2201-000432	C-CERAMIC,DISC;2pF,0.3pF,50V,CH,TP,5.0x3.5,5	
IC31	2201-000487	C-CERAMIC,DISC;33pF,5%,50V,SL,TP,5x3,5m	
IC2	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,14x3,5	
IC87	2201-000557	C-CERAMIC,DISC;0.47nF,10%,50V,SL,TP,8x3.5,5	
JC310	2201-000557	C-CERAMIC,DISC;0.47nF,10%,50V,SL,TP,8x3.5,5	
JC354	2201-000557	C-CERAMIC,DISC;0.47nF,10%,50V,SL,TP,8x3.5,5	
IC44	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
IC59	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
JC302	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
JC317	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
JC319	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
JC385	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
QC020	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
QC21	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
RC710	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
RC712	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
IC36	2201-000573	C-CERAMIC,DISC;0.047nF,5%,50V,NP0,TP,5x3.5,5	
IC83	2201-000576	C-CERAMIC,DISC;0.047nF,5%,50V,SL,TP,5x3,2.5	
IC57	2201-000582	C-CERAMIC,DISC;0.004nF,0.25pF,50V,NP0,TP,4x3.5,5	

Location no.	Code no.	Description & Specifiation	Remarks
IC12	2201-000666	C-CERAMIC,DISC;7PF,0.5PF,50V,CH,TP,5X3,5	
IC81	2201-000666	C-CERAMIC,DISC;7PF,0.5PF,50V,CH,TP,5X3,5	
2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5		
IC007	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC098	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC10	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC104	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC34	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC38	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC85	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC97	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC18	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC19	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC6	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC617	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
QC7	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,8x3,5	
IC009	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
IC011	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC002	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC340	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC351	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC356	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC357	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
JC401	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
IC010	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
IC012	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
QC611	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
QC612	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
QC1	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
QC2	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
JC343	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
JC345	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
JC318	2202-000819	C-CERAMIC,MLC-AXIAL;47NF,+80-20%,50V,Y5V,TP,3.5X19	
QC20	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
QC5	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
QC603	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
QC619	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
IC41	2202-000850	C-CERAMIC,MLC-AXIAL;2.2NF,30%,16V,Y5R,TP,3.5X1.9,-	
JC323	2301-000365	C-FILM,PEF;1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
JC330	2301-000365	C-FILM,PEF;1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
JC338	2301-000365	C-FILM,PEF;1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
JC329	2301-000370	C-FILM,PEF;1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
JC339	2301-000370	C-FILM,PEF;1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
IC006	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
QC604	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
QC605	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
JC320	2301-000379	C-FILM,PEF;10NF,10%,50V,TP,6X7X3.2MM,5MM	
JC322	2301-000379	C-FILM,PEF;10NF,10%,50V,TP,6X7X3.2MM,5MM	
JC325	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
JC342	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
IC4	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
IC5	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
JC332	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
JC340	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
IC40	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
JC337	2301-000442	C-FILM,PEF;4.7nF,10%,50V,TP,5.5x7x3mm,5mm	
JC355	2301-000442	C-FILM,PEF;4.7nF,10%,50V,TP,5.5x7x3mm,5mm	
IC8	2301-000462	C-FILM,PEF;6.8NF,10%,50V,TP,6X12X3,3.5MM	
IC7	2301-000470	C-FILM,PEF;68NF,5%,50V,TP,10X12.5X5.5,7MM	
JC344	2301-000474	C-FILM,PEF;8.2NF,10%,50V,TP,6.5X12X3.5,3.	
JC578	2301-000474	C-FILM,PEF;8.2NF,10%,50V,TP,6.5X12X3.5,3.	
IC28	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
UC4	2401-000243	C-AL;100uF,20%,10V,GP,TP,6.3x5,5	
IC35	2401-000303	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
JC381	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
JC382	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
QC001	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
RC711	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
RC712	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
RC784	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
RC708	2401-000970	C-AL;22UF,20%,50V,WT,TP,5X11,2MM	
JC301	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC304	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC307	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC309	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC324	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC336	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC337	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC341	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC346	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
JC353	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
RC706	2401-001067	C-AL;3300UF,20%,42V,GP,-,18X35.5,7.	
QC620	2401-001125	C-AL;330UF,20%,25V,WT,TP,10X12.5,5M	
JC308	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
JC333	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
JC351	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
JC359	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
QC630	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
JC314	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
IC003	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
IC11	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
IC42	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
IC86	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	

Location no.	Code no.	Description & Specifiation	Remarks
JC321	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
IC008	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
IC58	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
JC380	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
JC586	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
QC602	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
QC618	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
QC101	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
QC4	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
RC707	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
IC1	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
IC9	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
QC606	2401-001969	C-AL;470uF,20%,25V,GP,TP,10x12.5,5	
QC613	2401-001969	C-AL;470uF,20%,25V,GP,TP,10x12.5,5	
IC50	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
JC316	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
QC10	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC11	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC12	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC13	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC14	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC15	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC16	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC17	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC8	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
QC9	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
JC303	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
JC313	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
JC383(MA	NU 2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
RC783	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
JL332	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
-	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
RF703*2	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
RD711	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD712	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD713	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
RD704	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
RD705	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
RD706	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
RD707	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
RQ702	0502-000424	TR-POWER;2SB1566-F,PNP,2W,TO-220FN,BK,1	
RQ708	0502-000425	TR-POWER;2SD2395-F,NPN,2W,TO-220FN,BK,1	
IQ099	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP	
MIC1	1201-000358	IC-PREAMP;22291,DIP,24P,-,DUAL,-,PLASTIC	
MIC10	1201-001385	IC-POWER AMP;7269A,ZIP,11,19.6,DUAL,13,PLAS	
MIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.1,PLASTIC,1	
-	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD711*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD712*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RD713*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RR781*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RR782*2	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
RR783	2003-000556	R-METAL OXIDE(S);2.2ohm,5%,2W,AA,TP,4x12mm	
RR784	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
RC706	2401-001067	C-AL;3300UF,20%,42V,GP,-,18X35.5,7.	
TCF5	2903-000119	FILTER-CERAMIC;SFE10.7MJA-10-A	
RF703	3601-000275	FUSE-FERRULE;250V,400MA,TIME LAG,GLASS,5X20	
RF704	3601-000318	FUSE-CARTRIDGE;250V,800mA,TIME-LAG,GLASS,5x20mm	
MWF3	3711-000733	CONNECTOR-HEADER;BOX,17P,1R,2.5MM,STRAIGHT,SN	
ACW2	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
FJ2	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
MWF4	3711-002809	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
MWF1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
AJ1	3716-000209	TERMINAL-BLOCK;-,-,-,60V,7A	
MJ4	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
MJ2	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
MIC8	AC14-12001G	IC;KA78L05,T,-	
SFT1	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
SL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
SL3	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
MWF5	AH39-20008P	LEAD-CONNECTOR ASS'Y;5264,5395,2P,250MM,1007#26	
H1	AH62-00019A	HEAT SINK—MAIN;-,AL EXTR,-,-,-,-,-,MAXK18	
	AH94-00224D	**ASSY TAPG FRONT AUTO**	**S.N.A.**
UD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD4	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD5	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD7	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UZD1	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO-41	
UQ4	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1W,TO-92L,-,120-	
UQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ3	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K/47K,TO-92,TP	
ULED1	0601-001232	LED;TR,LED,1PCS,130-260%	
ULED2	0601-001232	LED;TR,LED,1PCS,130-260%	
UR020	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR110	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR104	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR111	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR105	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR112	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR021	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR116	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR119	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR120	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR121	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR122	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR117	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR109	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR126	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR128	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR129	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR130	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR131	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR132	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR138	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR139	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR140	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR141	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR143	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR146	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR147	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR157	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR022	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR101	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR113	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR123	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR137	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR145	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR188	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR106	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR113	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
IR125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR107	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR114	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR124	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR135	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR108	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR115	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR118	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR022	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UC12	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
UC8	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,5	
UC13	2201-000423	C-CERAMIC,DISC;0.027nF,5%,50V,NP0,TP,5x3,2.5	
UC14	2201-000423	C-CERAMIC,DISC;0.027nF,5%,50V,NP0,TP,5x3,2.5	
UC1	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC10	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC18	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC19	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC2	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC6	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC18	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC7	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
UC4	2401-000244	C-AL;100uF,20%,10V,GP,TP,6.3x7,5	
UC11	2401-000759	C-AL;220NF,20%,50V,GP,-,5X11,2MM	
UC9	2401-001355	C-AL;470UF,20%,10V,GP,-,8X11.5,5MM	
UC17	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
SW1	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW10	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW11	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW12	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW13	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW14	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW15	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW16	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW17	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW2	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW3	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW4	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW5	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW6	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW7	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW8	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
SW9	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
UIC2	1203-000276	IC-POSI.FIXED REG.;7805,TO-220,3P,-,PLASTIC,4.8/5	
UR220	2003-000710	R-METAL OXIDE(S);47ohm,5%,2W,AA,TP,4x12mm	
RC701	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
RC702	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,	
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM	
SW18	3404-000160	SWITCH-TACT;12V,50mA,160gf+-50gf,6.55x7.5x	
SW19	3404-000160	SWITCH-TACT;12V,50mA,160gf+-50gf,6.55x7.5x	
FCW2	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,	
FCW1	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN	
ACW1	3711-000190	CONNECTOR-HEADER;1WALL,2P,1R,7.92MM,STRAIGHT,SN	
LAMP1	4713-001130	LAMP-PILOT;6V,75mA,0.45W,BLUE,222Lm,-,3.9x7mm	
LAMP2	4713-001130	LAMP-PILOT;6V,75mA,0.45W,BLUE,222Lm,-,3.9x7mm	
LAMP3	4713-001130	LAMP-PILOT;6V,75mA,0.45W,BLUE,222Lm,-,3.9x7mm	
URV1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-	

Location no.	Code no.	Description & Specifiation	Remarks
LCD	AH07-00001A	LCD;-,-,MAX900,-	
UIC1	AH11-00006A	MASK-ROM;LC867232A-XXXX,100P,QFP,-,8,-	
RL701	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-	
RL702	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-	
	AH61-20550B	HOLDER-LCD;ABS 94HB,WHT,MAXK15/17	
H1	AH67-40044A	FILTER-LCD;-,PC,T0.5,-,MILKY,-,-,MAX900,-	
TVD1	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S	
IC3	2201-000204	C-CERAMIC,DISC;10pF,5%,50V,RH,5.0*3.0,5MM,TP	
TX2	2801-003278	CRYSTAL-UNIT;4MHz,30ppm,28-AAM,20pF,100ohm,	
TCF4	2802-001124	RESONATOR-CERAMIC;18.95KHz,+-38Hz,BK,7x9x3.5mm	
TCF5	2903-000105	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,180KHZ+-50KH	
MIC6	AH14-10008G	IC—TUNER;U2514B,SSO,TUNER,28,-	
MIC7	AH14-10008H	IC—PLL;U4285BM,SSO,MAXK15,20P,-	
TL5	AH26-00047A	TRANS-IF;-,KS-75D,FM DET,-,7.6 x 7.6,-,10700KHz,-	
TL4	AH26-00047B	TRANS-IF;-,LKS-75D00-X000002-0,FM IFT,-,7.6 x 7.6	
TL4	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,	
TL6	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
TL11	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
TL9	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
TL10	AH27-00013A	COIL-OSC;LKS75M00-0060LMA-0,350UH,MW ANT	
TL2	AH27-00033A	COIL-OSC;LKS73AO-X000351-0,350UH,FM OSC	
TL1	AH27-90032F	COIL-SPRING;SP-1511,-,08¥Ó 2UEW,-,SPRING	
TCF6	AH29-00001A	FILTER—BPF;GFMB3-T,88~108MHZ,3DB MAX,-,TP	
	AH94-00231A	**ASSY-TAPG-MAIN OPTION,T-BAND AUTO**	**S.N.A.**
TCF3	2903-001234	FILTER-CERAMIC;-,0.455MHz,-,7dB,1dB,BK,AHCFM2-455Z	
DECKµGND	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-	
TP1	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-	
TP2	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-	
TP4	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-	
	G3V1-A	**G3VI;MAX940**	**S.N.A.**
	AH92-00005A	**ASSY-PCB-CD MAIN;G3VI,CD PACK**	**S.N.A.**
NQ1502	0501-000314	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,TP,90-	
NIC928	0904-001442	IC-DSP;9286,8Bit,QFP,80P,-,16.9344MHz,TR,CMOS,P	
NIC925	1003-000179	IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE,-,ST,	
NIC922	1204-001286	IC-ASP;KB9223,QFP,80P,-,PLASTIC,6V,20	
NR109	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR203	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR300	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57L	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57R	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR606	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR602	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR603	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR104	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR107	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR100	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR120	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR121	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR204	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
FREE	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR103	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR119	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR400	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
NR115	2007-000444	R-CHIP;180KOHM,5%,1/10W,DA,TP,2012	
NR10	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR11	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR12	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR5	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54L	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54R	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR6	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR604	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR7	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR804	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR114	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
NR50L	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR50R	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR101	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP,2012	
NR200	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52L	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52R	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR201	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR202	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR105	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR995	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR996	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR997	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR998	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR53L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR53R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
SR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR117	2007-000898	R-CHIP;430Kohm,5%,1/10W,DA,TP,2012	
NR108	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR111	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR112	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012	

Location no.	Code no.	Description & Specifiation	Remarks
NR116	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012	
NR994	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
NR999	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
	2007-001216	R-CHIP;82OHM,5%,1/10W,DA,TP,2012	
NC107	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC108	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC119	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC121	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC600	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC901	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
NC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC112	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC113	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC116	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC205	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC502	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC503	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC504	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC53L	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC53R	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC602	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC800	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC804	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC905	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
SC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
SC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
SC6	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
NC190	2203-000335	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,2012	
NC190	2203-000429	C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,2012	
NC117	2203-000477	C-CERAMIC,CHIP;1uF,+80-20%,16V,Y5V,TP,2012,-	
NC110	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012	
NC118	2203-000787	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012	
NC101	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
NC111	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
NC125	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012	
NC100	2203-000892	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,2012	
NC106	2203-000892	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,2012	
NC200	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
NC667	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012	
NC115	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2012,-	
NC104	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC52L	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC52R	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC603	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC903	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012	
NC102	2203-001551	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
NC201	2203-001551	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012	
NC202	2203-001619	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,2012	
NC203	2203-001619	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,2012	
NL105	3301-000325	CORE-FERRITE BEAD;AB,3.2x2.5x1.3mm,-,-	
SIC1	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
SIC2	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
NXF100	2802-000211	RESONATOR-CERAMIC;16.93MHZ,0.5%,TP,10.0X5.0X10.0	
SCW5	3708-001131	CONNECTOR-FPC/FC/PIC;5P,1.25mm,STRAIGHT,SN	
WCW1	3708-001252	CONNECTOR-FPC/FC/PIC;16P,1mm,STRAIGHT-F,SN	
SCW1	3708-001438	CONNECTOR-FPC/FC/PIC;22P,1.25mm,ANGLE,SN	
NCW500	3711-000906	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	
SCW7	3711-003379	CONNECTOR-HEADER;NOWALL,3P,1R,2.5mm,STRAIGHT,SN	
AµA'	3811-000121	WIRE-PVC CU;BCWA,300V,100MM,7/0.16MM,#26,B	
BµB'	3811-000121	WIRE-PVC CU;BCWA,300V,100MM,7/0.16MM,#26,B	
NCW101	AH39-20025S	LEAD-CONNECTOR,ASSY;-,51004-08,35023-08,8P,300MM,1	
NCW102	AH39-20561P	LEAD CONNECTOR-ASSY;-,5295,PHR,6P,150mm,1007#28	
ND200	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND202	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND203	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SZD1	0403-000352	DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500mW,DO	
SZD2	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50	
NQ1501	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SR1	2001-000027	R-CARBON;100OHM,5%,1/4W,AA,TP,2.4X6.4MM	
NR106	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR8	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR113	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR555	2008-000140	R-FUSIBLE;2.2OHM,5%,1/2W,AA,TP,3.5X9.4MM	
NC400	2202-000243	C-CERAMIC,MLC-AXIAL;33PF,5%,50V,SL,3.5X19,-,TP	
NC300	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
NC106	2202-000817	C-CERAMIC,MLC-AXIAL;4.7NF,20%,16V,Y5R,TP,3.5X19,-	
NC117	2301-000389	C-FILM,PEF;150nF,5%,50V,TP,12.5x15x7.5,7m	
NC105	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC501	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC702	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC904	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC14	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC114	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
NC301	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC700	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC701	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
SC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	

Location no.	Code no.	Description & Specifiation	Remarks
NC703	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
NC124	2401-001324	C-AL;470nF,20%,50V,GP,BK,3x5,1mm	
NC204	2401-001324	C-AL;470nF,20%,50V,GP,BK,3x5,1mm	
NC666	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
NC122	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC54	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NL101	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL102	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL100	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
SL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
NL300	3301-000297	CORE-FERRITE BEAD;AA,3.6x1.2x5.7mm,1400,2900G	
NL301	3301-000297	CORE-FERRITE BEAD;AA,3.6x1.2x5.7mm,1400,2900G	
NL302	3301-000297	CORE-FERRITE BEAD;AA,3.6x1.2x5.7mm,1400,2900G	
NIC05	AC14-12001G	IC;KA78L05,T,-	
SCO4	AC14-12001G	IC;KA78L05,T,-	
	PSK17E/XFO	SPEAKER-SYSTEM;MAXK17QH/XFO	

Location no.	Code no.	Description & Specifiation	Remarks

4. Block Diagram

4-1 Main Part

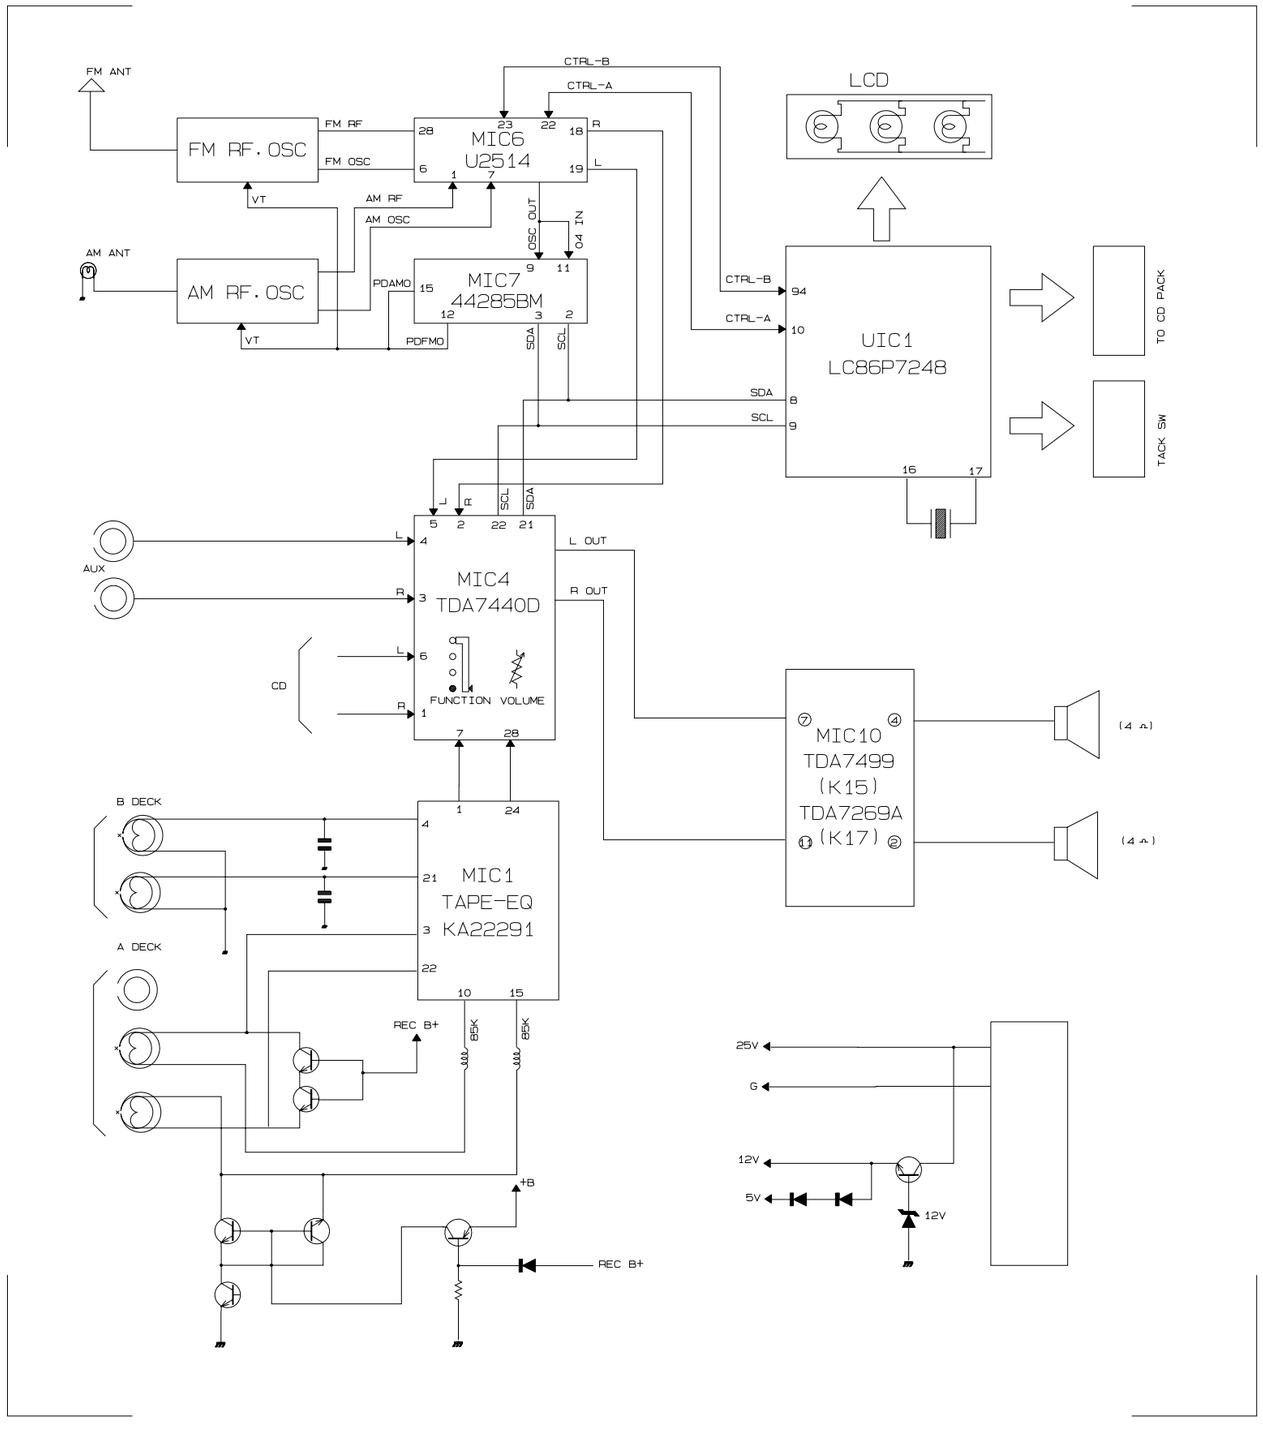

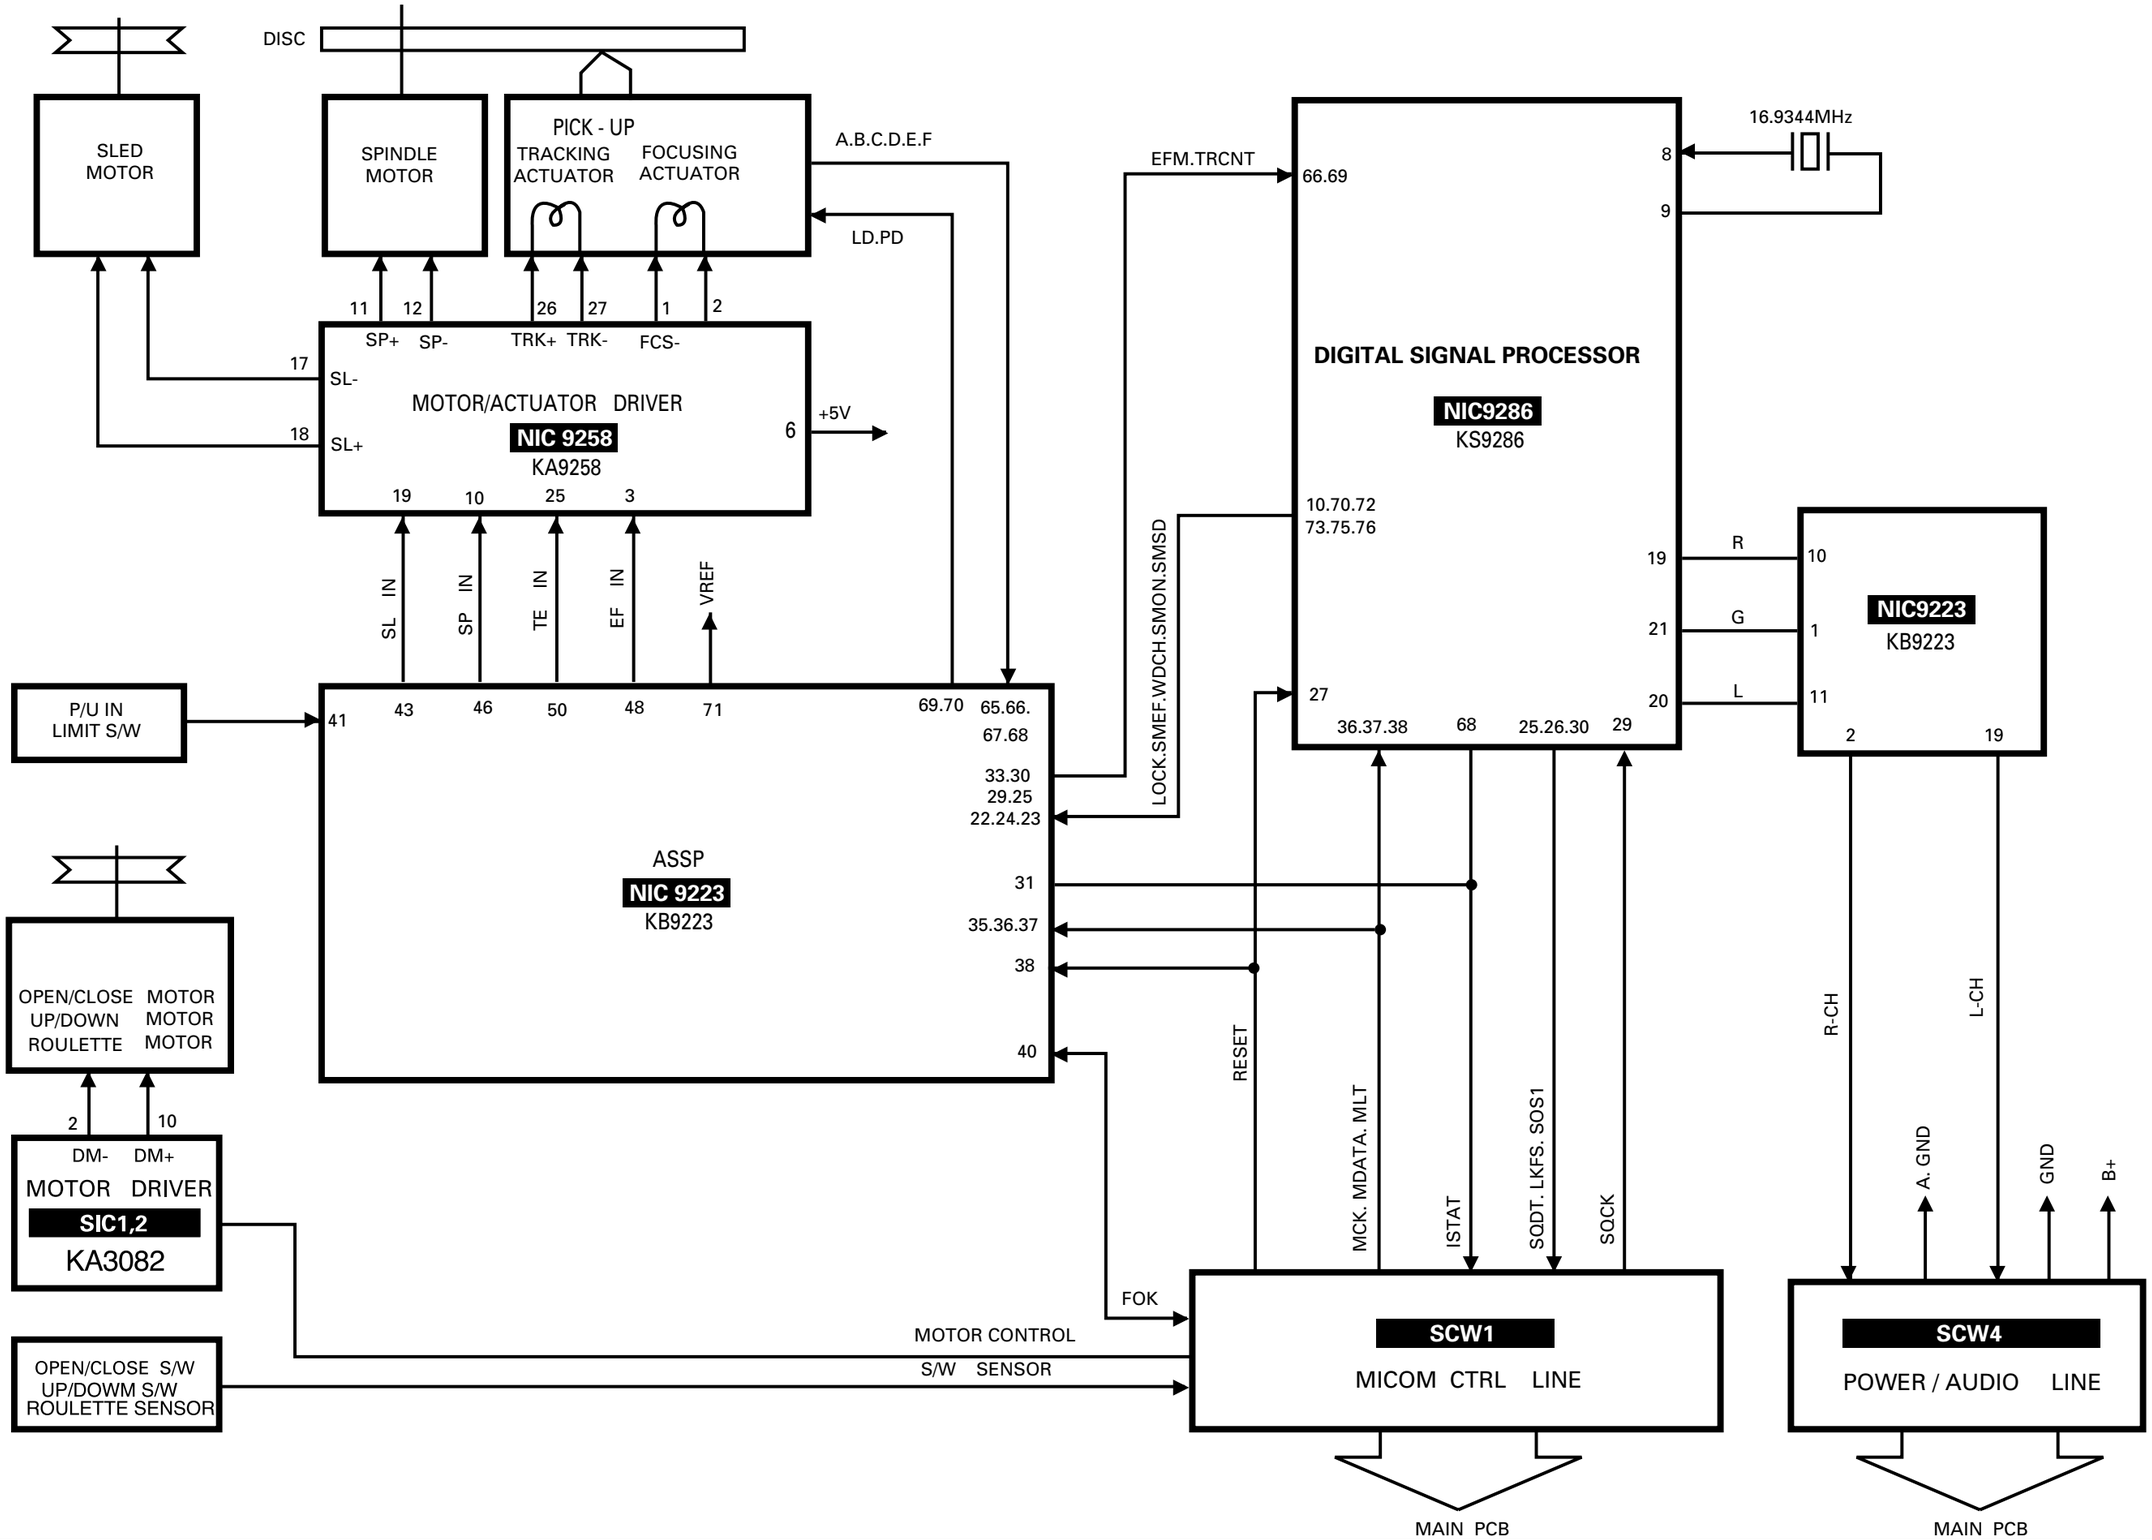
DISC
SLED MOTOR
SPINDLE MOTOR
PICK - UP
TRACKING ACTUATOR
FOCUSING ACTUATOR
A.B.C.D.E.F
LD.PD
11 12 26 27 1 2
SP+ SP- TRK+ TRK- FCS-
17
SL-
18
SL+
MOTOR/ACTUATOR DRIVER
NIC 9258
KA9258
6
+5V
19 10 25 3
SL IN
SP IN
TE IN
EF IN
VREF
P/U IN LIMIT S/W
41
43 46 50 48 71
69.70 65.66. 67.68
33.30 29.25 22.24.23
ASSP
NIC 9223
KB9223
31
35.36.37
38
40
EFM.TRCNT
LOCK.SMEF.WDCH.SMON.SMSD
RESET
MCK. MDATA. MLT
ISTAT
SQDT. LKFS. SOS1
SQCK
66.69
10.70.72 73.75.76
27
36.37.38 68 25.26.30 29
DIGITAL SIGNAL PROCESSOR
NIC9286
KS9286
16.9344MHz
8
9
19 R
21 G
20 L
NIC9223
KB9223
10
1
11
2 19
R-CH
L-CH
A. GND
GND
B+
OPEN/CLOSE MOTOR
UP/DOWN MOTOR
ROULETTE MOTOR
2 10
DM- DM+
MOTOR DRIVER
SIC1,2
KA3082
OPEN/CLOSE S/W
UP/DOWM S/W
ROULETTE SENSOR
FOK
MOTOR CONTROL
S/W SENSOR
SCW1
MICOM CTRL LINE
SCW4
POWER / AUDIO LINE
MAIN PCB
MAIN PCB

5. Printed Circuit Board Diagram

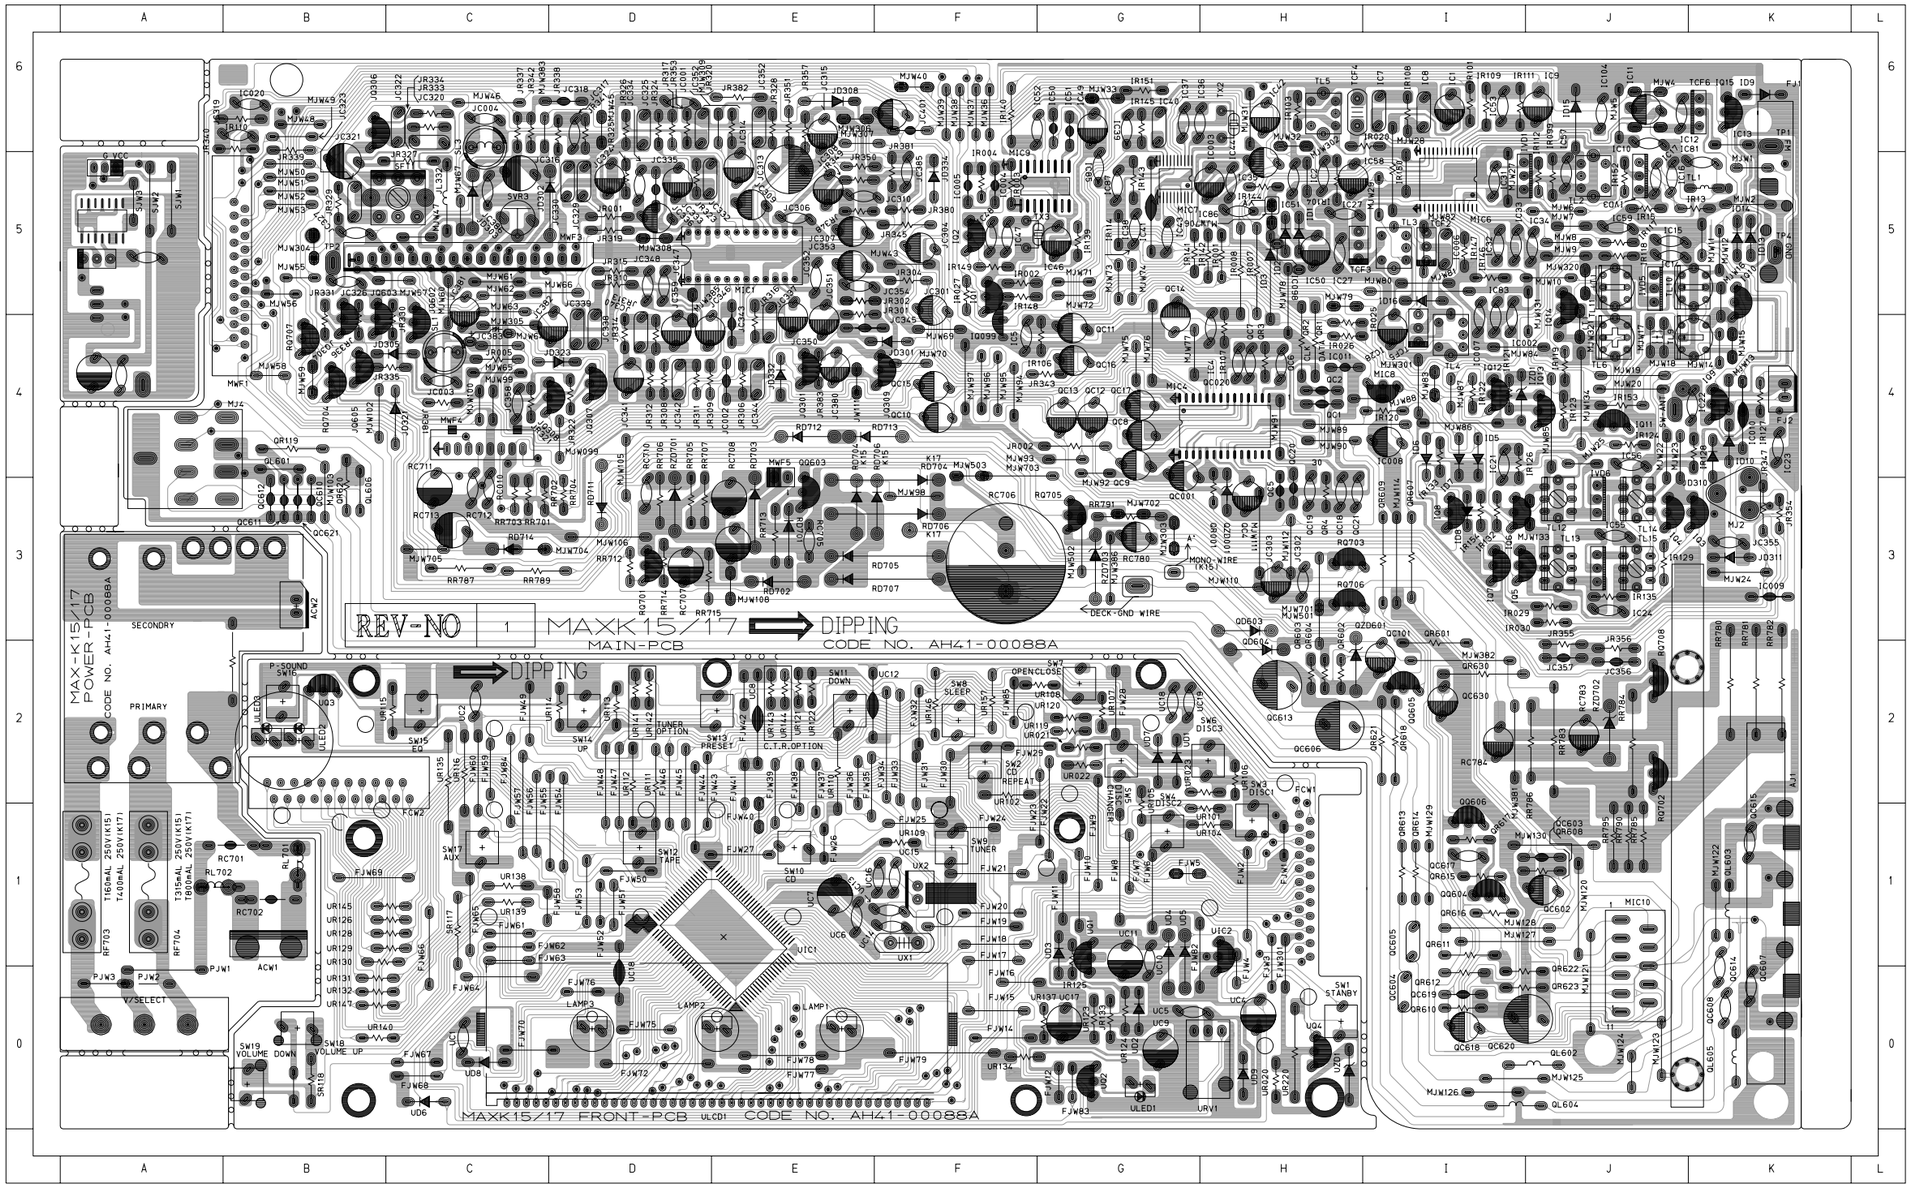

*** DIODE ***	*** TR ***
ID1 (H5)	IQ1 (F5)
ID10 (K4)	IQ10 (K5)
ID13 (K5)	IQ11 (J4)
ID14 (K5)	IQ12 (I4)
ID15 (J6)	IQ13 (J4)
ID16 (I5)	IQ14 (J5)
ID2 (H5)	IQ15 (K6)
ID3 (H5)	IQ2 (F5)
ID5 (I4)	IQ3 (K3)
ID6 (I4)	IQ4 (J3)
ID7 (I4)	IQ5 (I3)
ID8 (I3)	IQ6 (I3)
ID9 (K6)	IQ7 (I3)
JD301 (E4)	IQ8 (I3)
JD302 (D5)	IQ9 (K4)
JD303 (C5)	JQ301 (E4)
JD305 (B4)	JQ304 (B5)
JD308 (E6)	JQ306 (B6)
JD310 (K4)	JQ307 (D4)
JD311 (K3)	JQ308 (C4)
JD321 (C4)	JQ309 (F4)
JD323 (D4)	JQ602 (C5)
JD332 (E4)	JQ603 (B5)
JD334 (F5)	JQ605 (B4)
QD603 (H3)	MIC8 (I4)
QD604 (H2)	QQ603 (E3)
QZD001 (H4)	QQ604 (I1)
QZD601 (H3)	QQ605 (I2)
RD701 (E3)	QQ606 (I1)
RD702 (E3)	RQ701 (D3)
RD703 (E4)	RQ702 (J2)
RD704 (E3)	RQ703 (H3)
RD704 (F3)	RQ704 (B4)
RD705 (E3)	RQ705 (G3)
RD706 (F3)	RQ706 (H3)
RD706 (F3)	RQ707 (B4)
RD707 (E3)	RQ708 (J2)
RD711 (D3)	UIC2 (H1)
RD712 (E4)	UQ1 (G0)
RD713 (E4)	UQ2 (G0)
RD714 (C3)	UQ3 (B2)
RZD701 (D4)	UQ4 (H0)
RZD702 (J2)	
RZD703 (G3)	*** IC&WAFER ***
UD1 (G2)	ACW2 (B3)
UD2 (G0)	FJ2 (K4)
UD3 (G1)	MWF3 (C5)
UD4 (G1)	MWF4 (C4)
UD5 (G1)	MWF5 (E4)
UD6 (C0)	SW1 (H0)
UD7 (G2)	SW10 (E1)
UD8 (C0)	SW11 (E2)
UD9 (H0)	SW12 (D1)
UZD1 (H0)	SW13 (E2)
	SW14 (D2)
	SW15 (C2)
	SW16 (B2)
	SW17 (C1)
	SW18 (B0)
	SW19 (B0)
	SW2 (F2)
	SW3 (H1)
	SW4 (G1)
	SW5 (G2)
	SW6 (H2)
	SW7 (G2)
	SW8 (F2)
	SW9 (F1)
	TL2 (J5)
	TL3 (I5)
	TL4 (I4)
	TL5 (H6)
	V/SELECT (A0)

6. Wiring Diagram

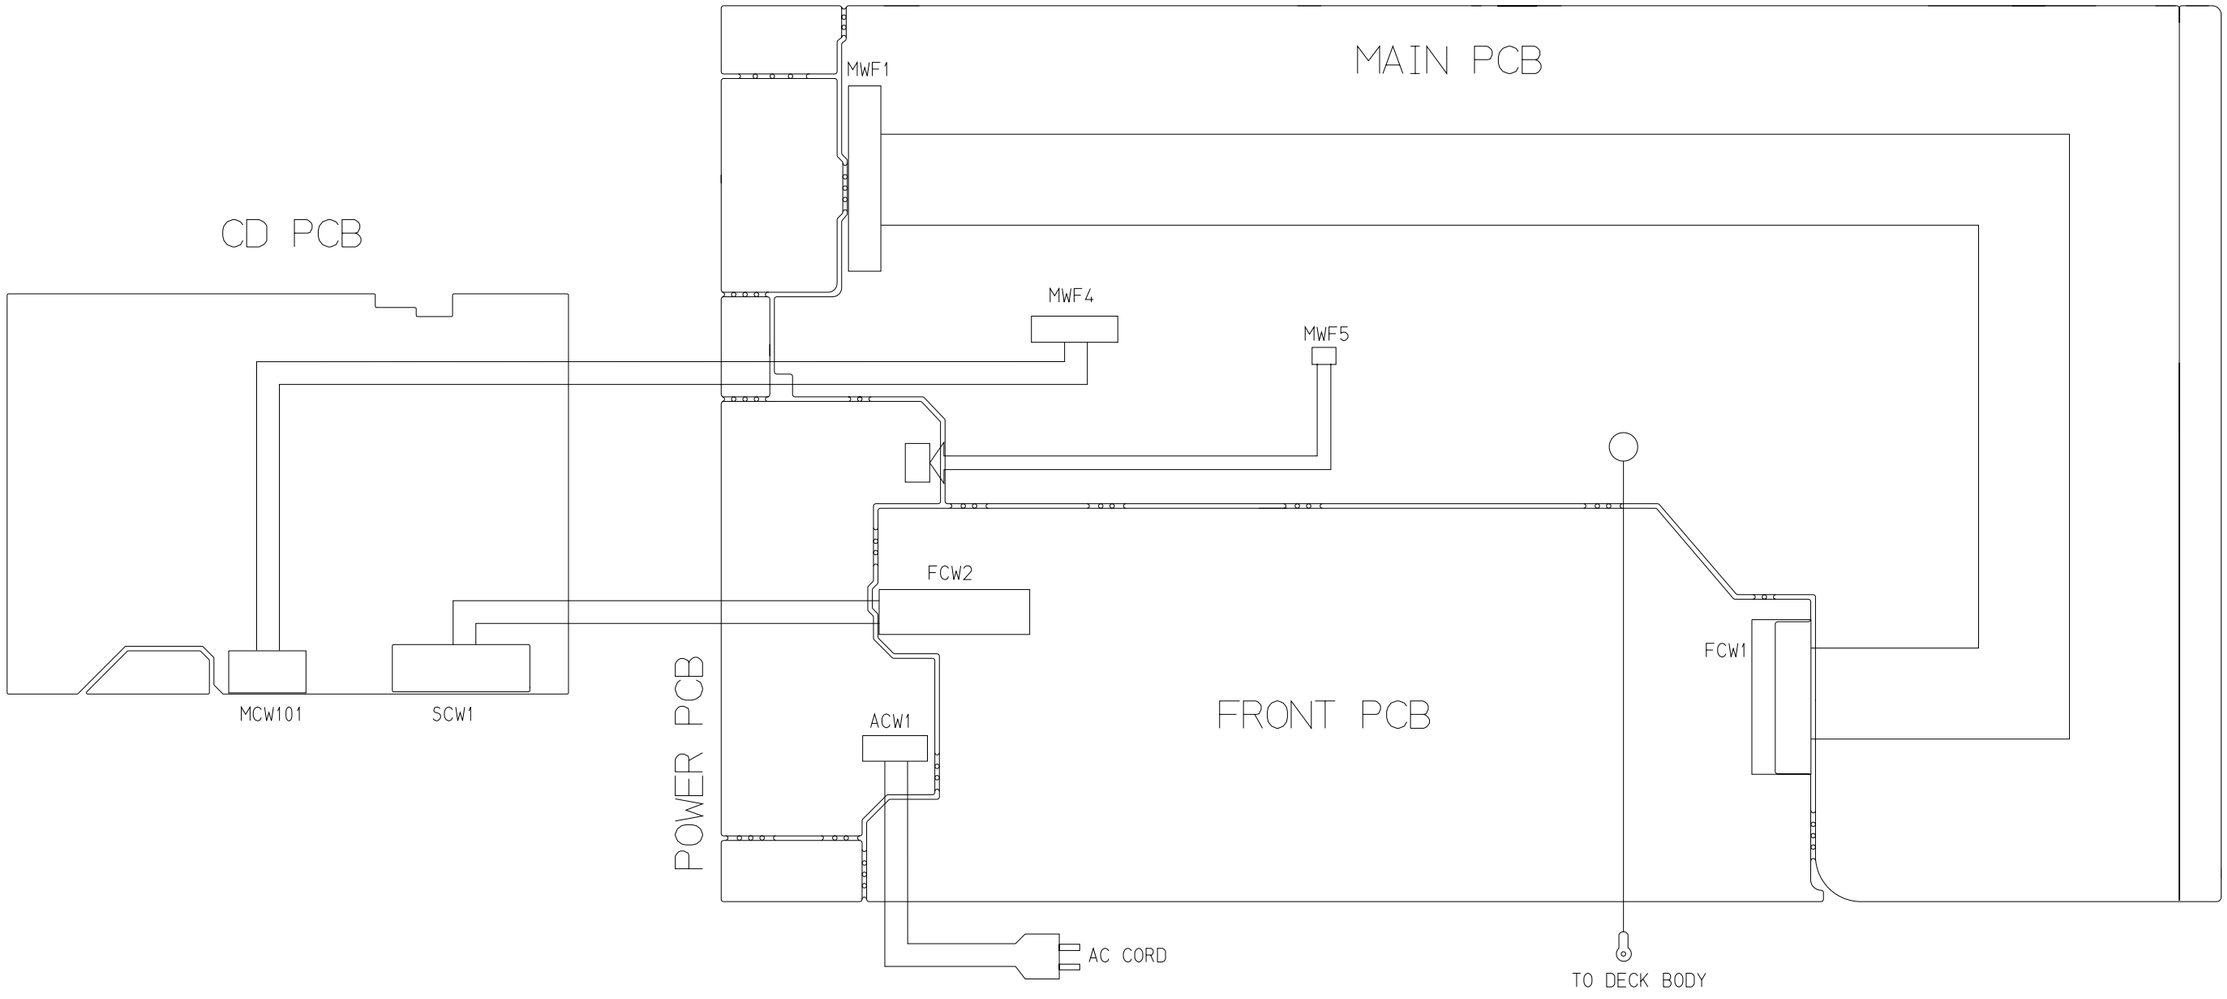

7. Schematic Diagram

7-1 CD Part

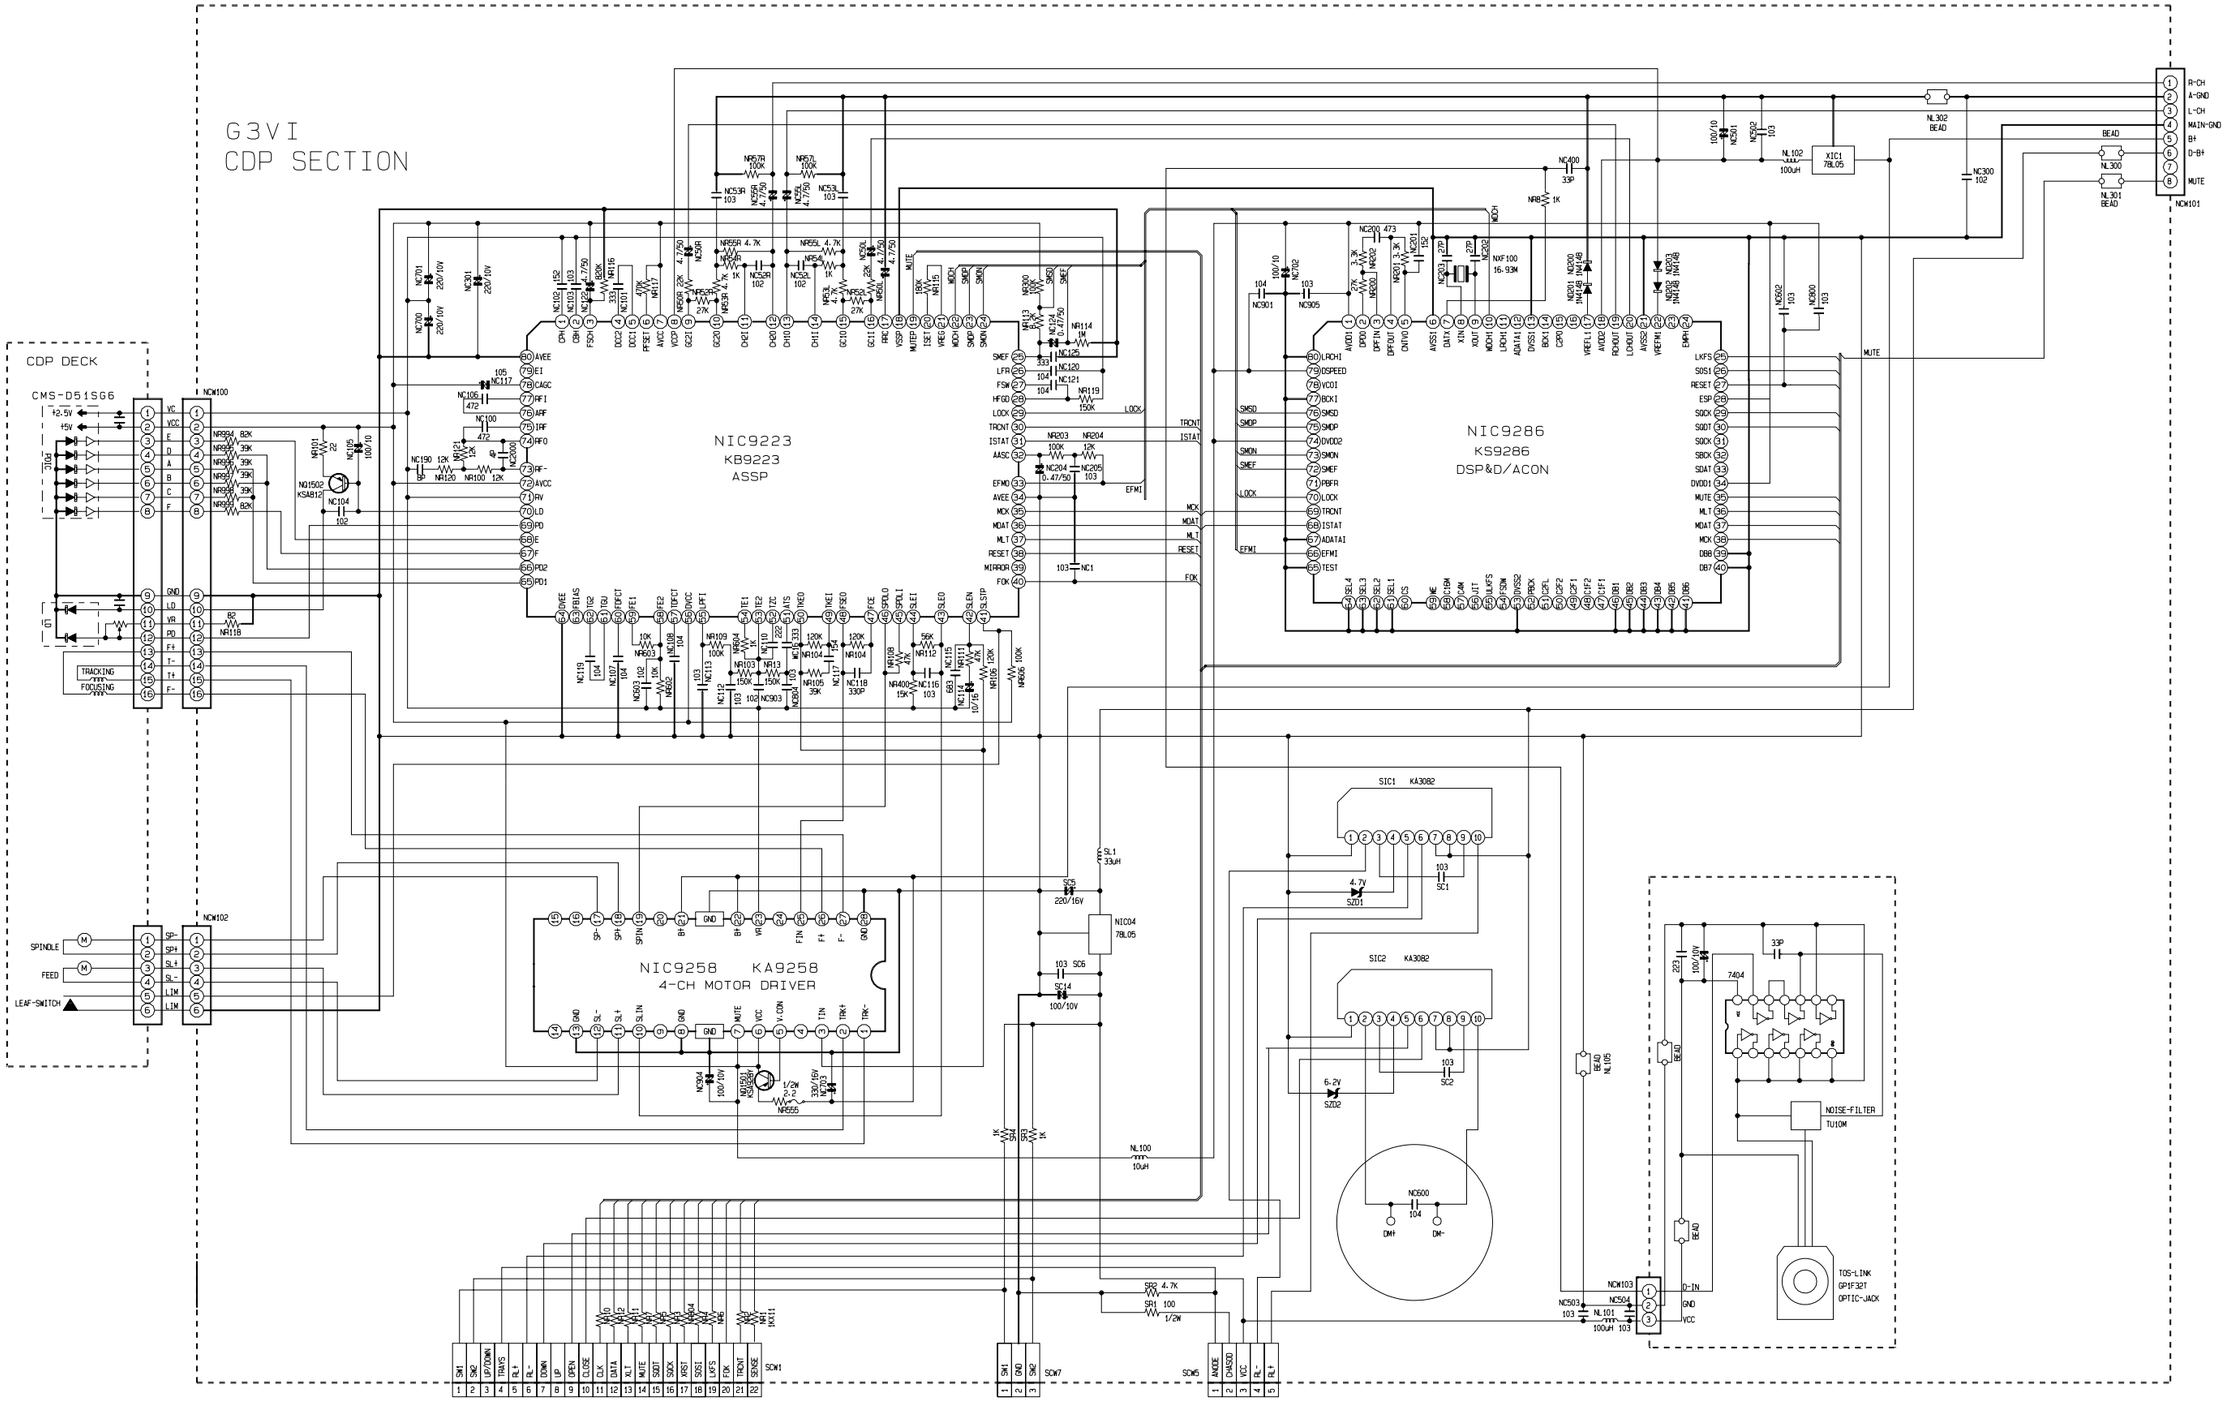

7-2 MAIN Part

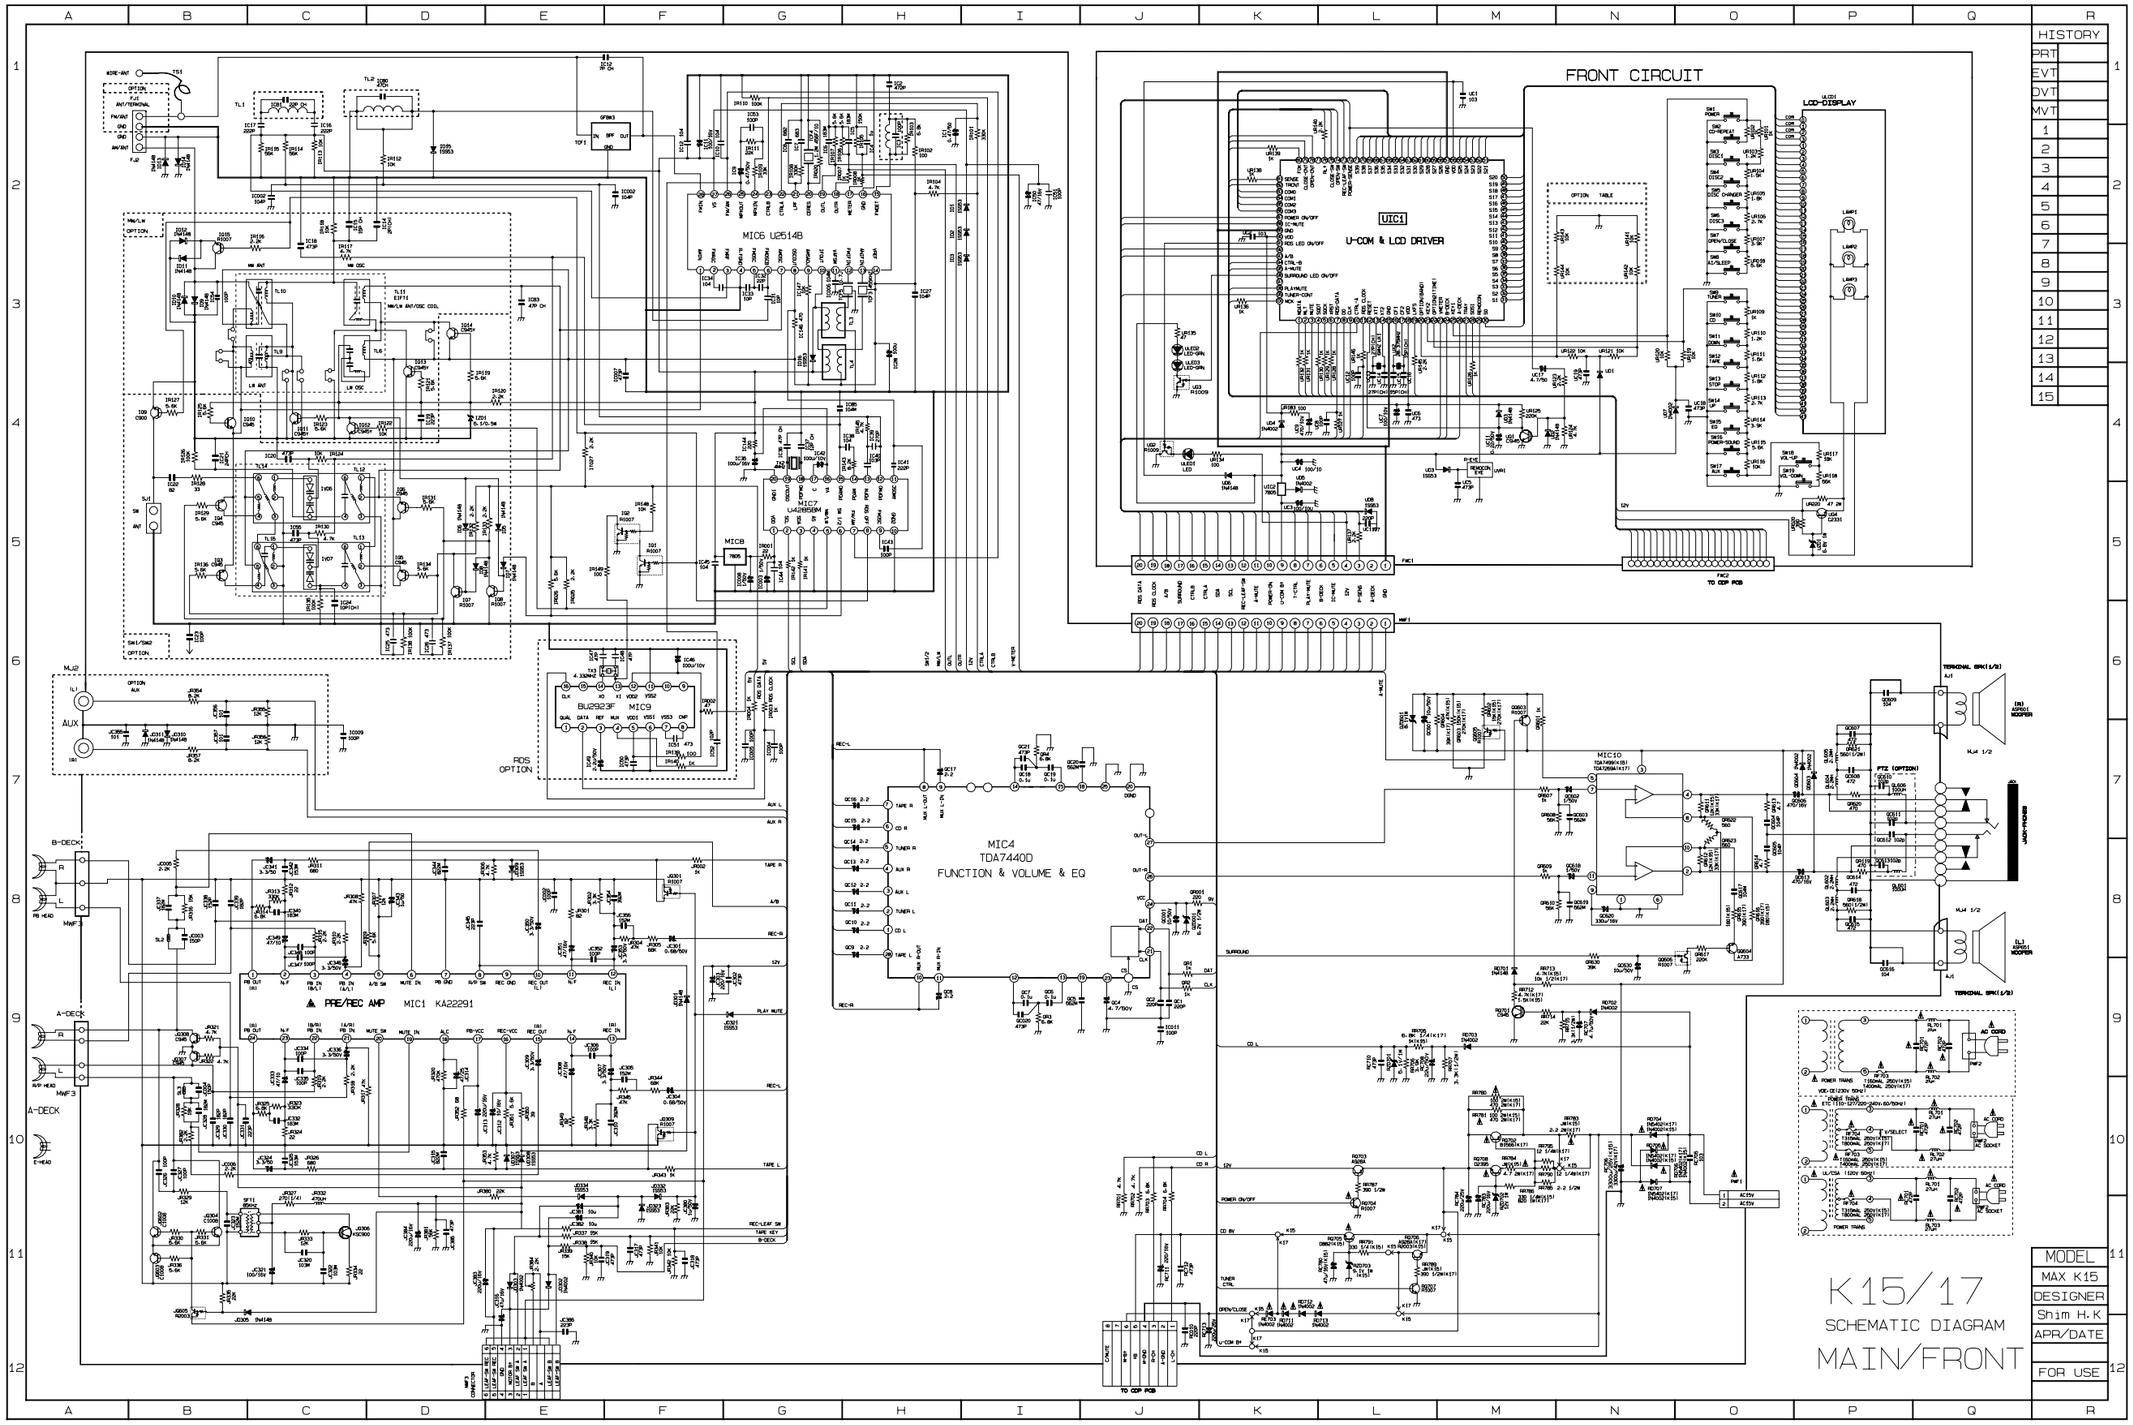
FRONT CIRCUIT
U-COM & LCD DRIVER
LCD-DISPLAY
MIC6 U2514B
MIC7 LA2265M
MIC9 BU2923F
MIC8
MIC4 TDA7440D FUNCTION & VOLUME & EQ
MIC10 TDA7496M
PRE/REC AMP MIC1 KA22291
AUX
B-DECK
A-DECK
RDS OPTION
TO CDP PCB
HISTORY
PRT
EVT
DVT
MVT
MODEL
MAX K15
DESIGNER
Shim H.K
APR/DATE
FOR USE
K15/17
SCHEMATIC DIAGRAM
MAIN/FRONT

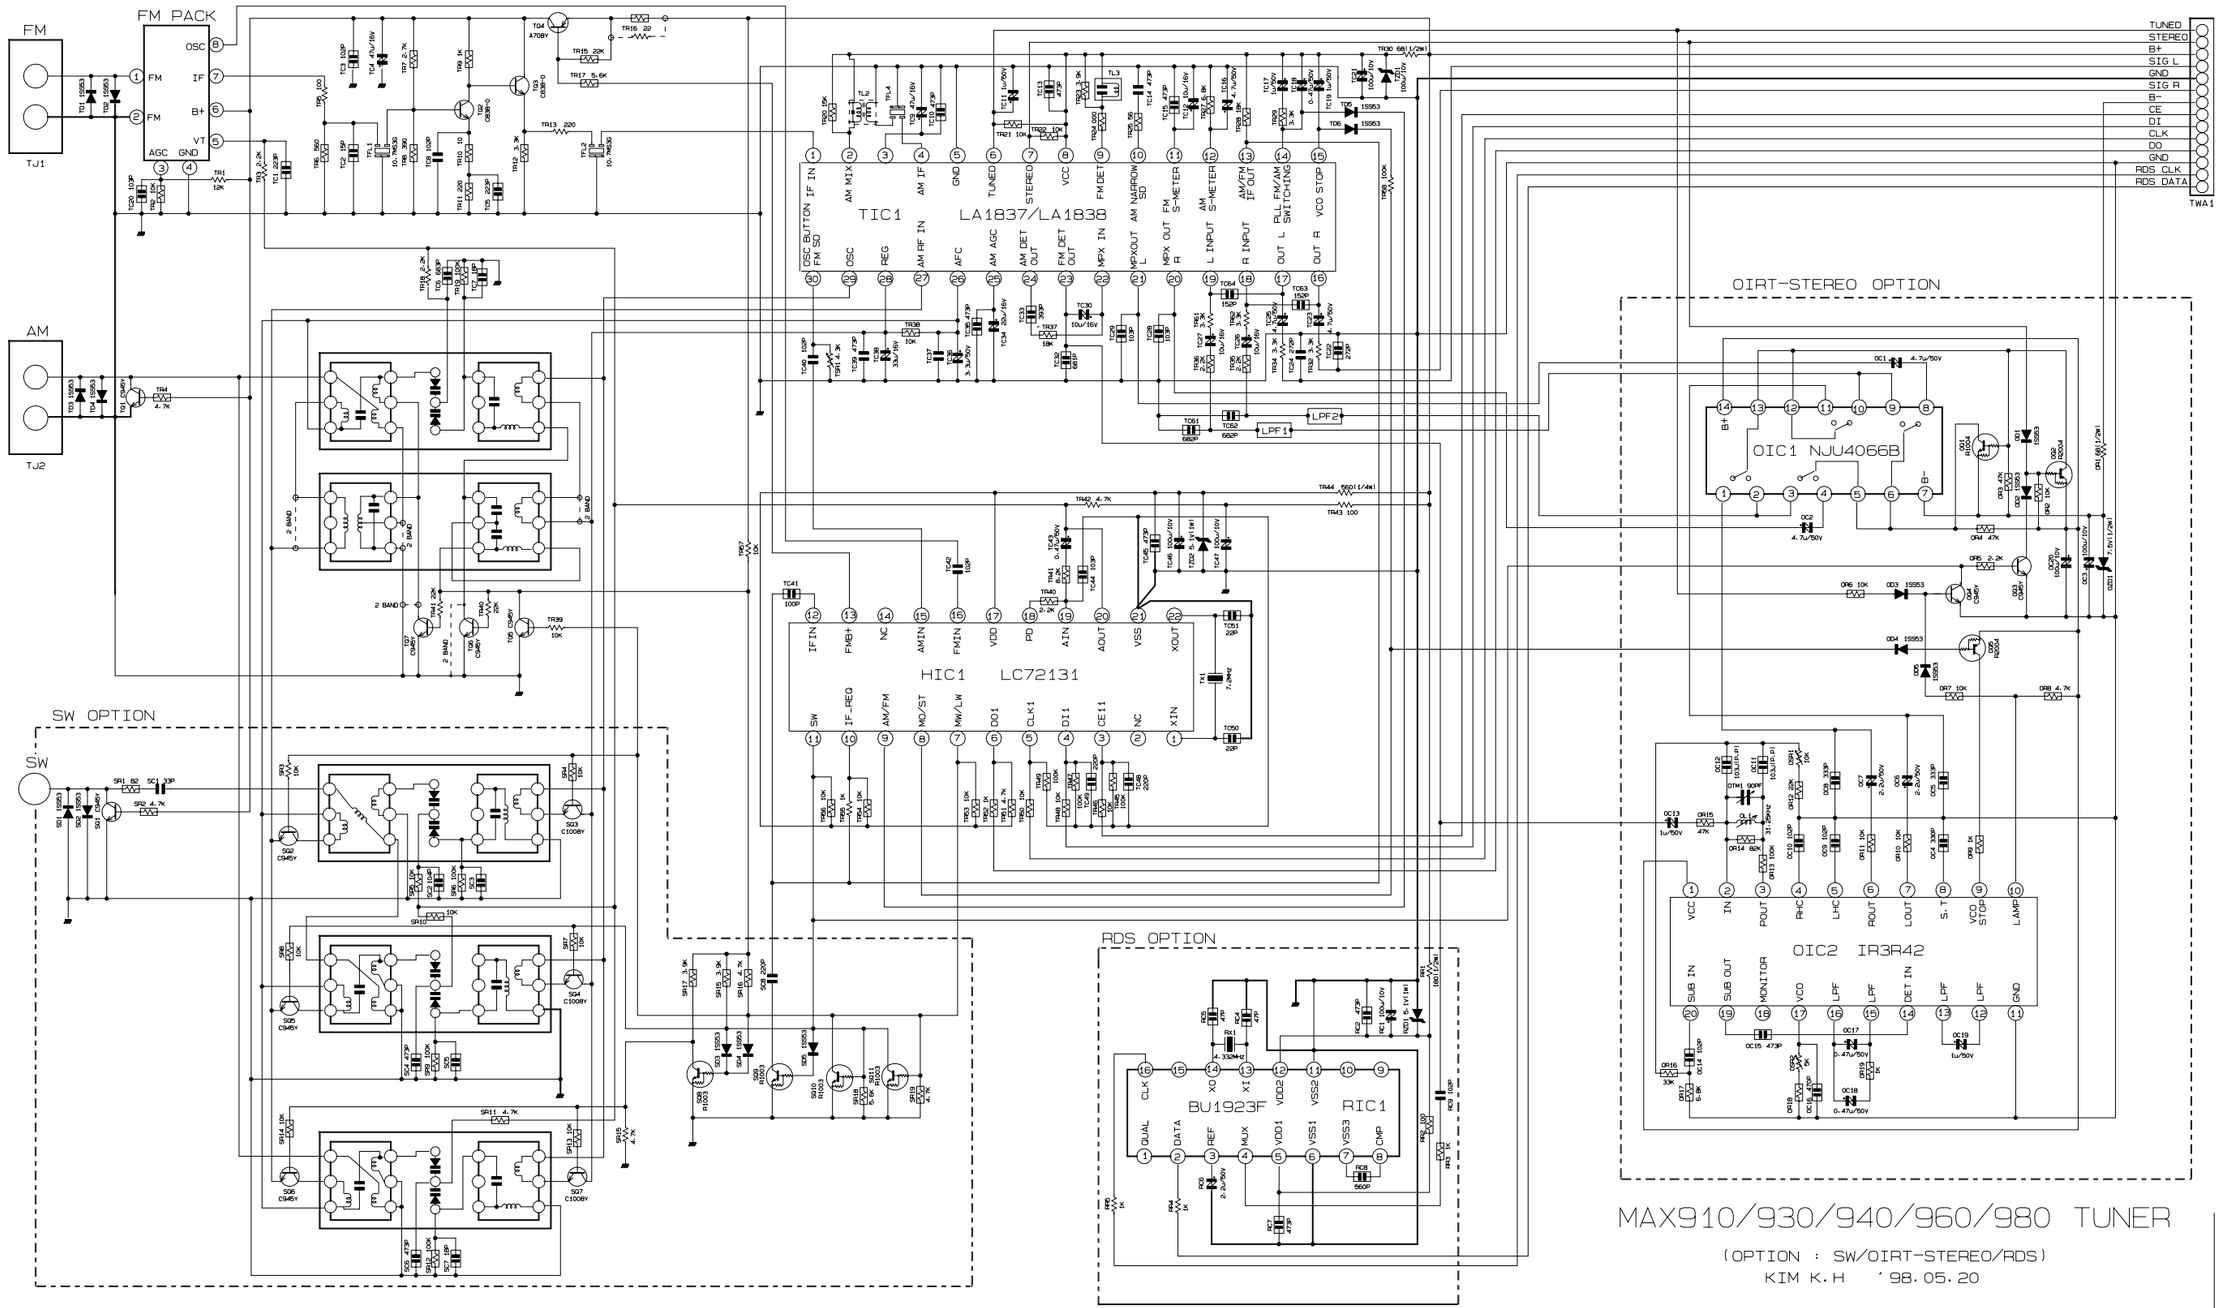

MAX910/930/940/960/980 TUNER

(OPTION : SW/OIRT-STEREO/RDS)

KIM K.H '98.05.20

SAMSUNG

3 CD CHANGER
MINI MINI COMPONENT
MAX-K15/17

SERVICE Manual

MIMI MIMI COMPONENT SYSTEM

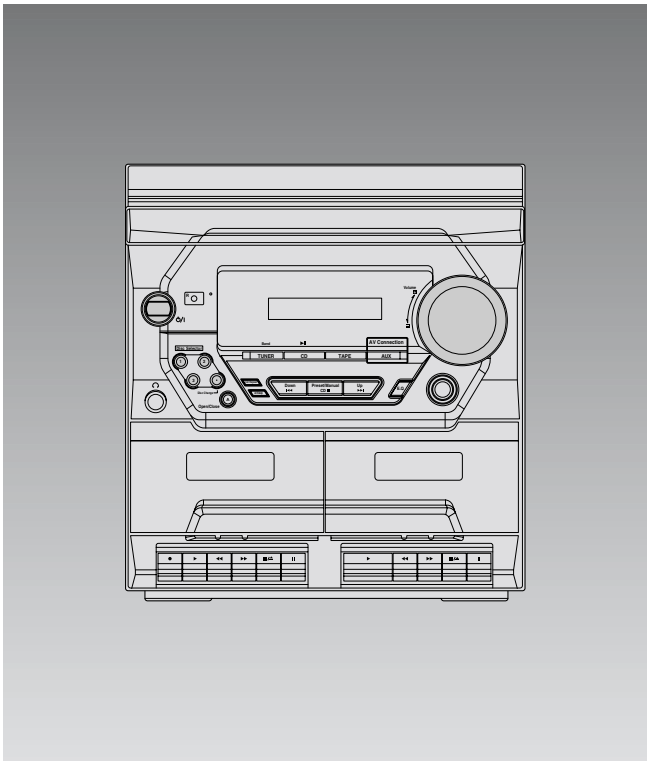

CONTENTS

1. Alignment and Adjustments
2. Exploded Views and Parts List
3. Electrical Parts List
4. Block Diagrams
5. PCB Diagrams
6. Wiring Diagram
7. Schematic Diagrams
8. Disassembly and Reassembly

ELECTRONICS

© Samsung Electronics Co.,Ltd. APR. 2000
Printed in Korea
Code no. AH68-00073M